



Accessory Fitting Instructions


Luggage Rack Kit	
Kit Number	Models Affected
A9500896	Tiger Sport from VIN AU7774

Thank you for choosing this Triumph genuine accessory kit. This accessory kit is the product of Triumph's use of proven engineering, exhaustive testing, and continuous striving for superior reliability, safety and performance.

Completely read all of these instructions before commencing the installation of the accessory kit in order to become thoroughly familiar with the kit's features and the installation process.

These instructions should be considered a permanent part of your accessory kit, and should remain with it even if your accessory equipped motorcycle is subsequently sold.

Parts Supplied:

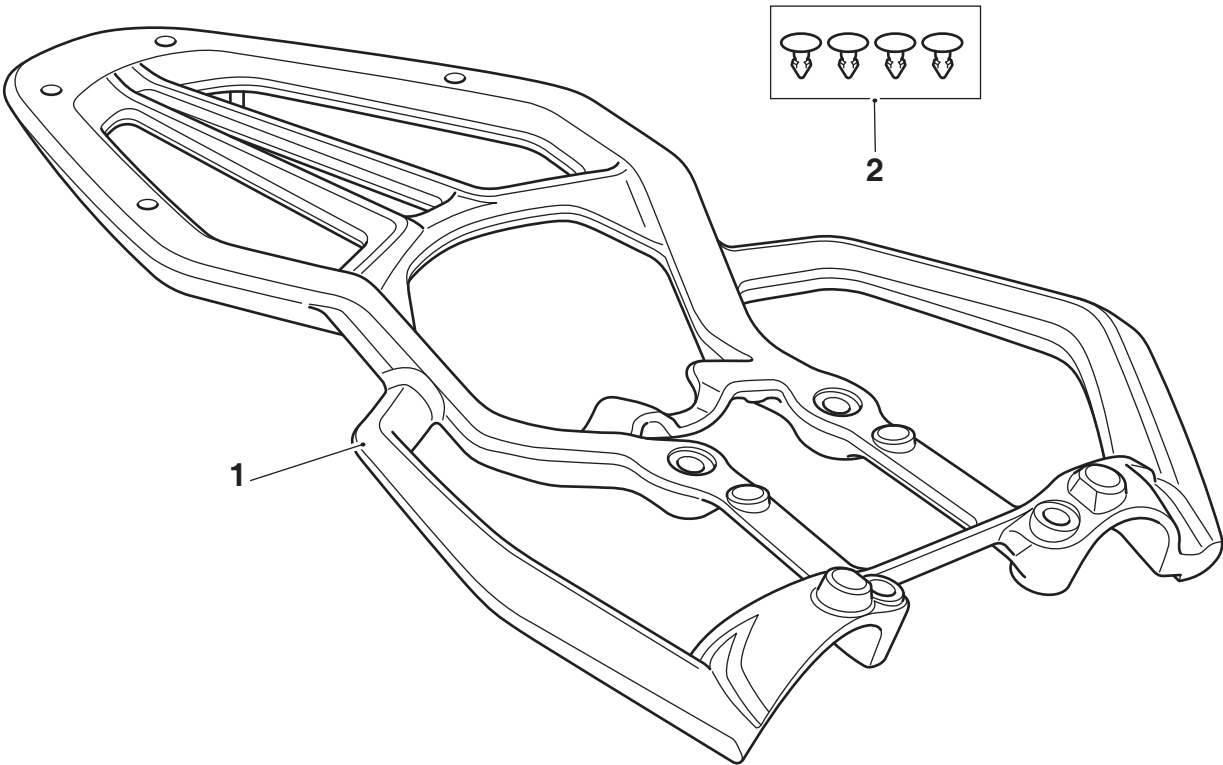

1. Luggage Rack	1 off	2. Firtree plug	4 off
-----------------	-------	-----------------	-------



Warning

Fit only genuine Triumph accessories to those models approved by Triumph as listed in the associated Triumph fitting instructions. The accessory kits covered in this instruction are designed for use on specific models of Triumph motorcycle. The accessory kits and the models applicable are listed at the start of the instruction. They should never be fitted to any other Triumph model or to any other manufacturer's motorcycle. Fitting an accessory kit to a Triumph model not listed, or to any other manufacturer's motorcycle will affect the performance, stability and handling of the motorcycle. This may affect the rider's ability to control the motorcycle and could result in an accident causing severe injuries or death.



Warning

Always have Triumph approved parts, accessories and conversions fitted by a trained technician of an authorised Triumph dealer. The fitment of parts, accessories and conversions by a technician who is not of an authorised Triumph dealer may affect the handling, stability or other aspects of the motorcycle's operation which may result in loss of motorcycle control and an accident.



Warning

Make sure the motorcycle is supported. A correctly supported motorcycle will help prevent it from falling. An unstable motorcycle may fall, causing injury to the operator or damage to the motorcycle.




Warning

A torque wrench of known accurate calibration must be used when fitting this accessory kit. Failure to tighten any of the fasteners to the correct torque specification may affect motorcycle performance, handling and stability. This may result in loss of motorcycle control and an accident.

Note:


- Triumph offers a broad range of approved genuine accessories for your motorcycle. We cannot therefore cover all possible equipment variations in these instructions. For removal and installation of Triumph Genuine Accessories always refer to the instructions supplied with the respective accessory kit. To obtain additional copies of any Triumph accessory instructions, visit www.triumphinstructions.com or contact your authorised Triumph dealer.

1. Remove the seat, as described in the Service Manual.
2. Disconnect the battery, as described in the Service Manual.
3. Remove the left hand and right hand rear body panels. Retain the body panels and fixings for reuse.

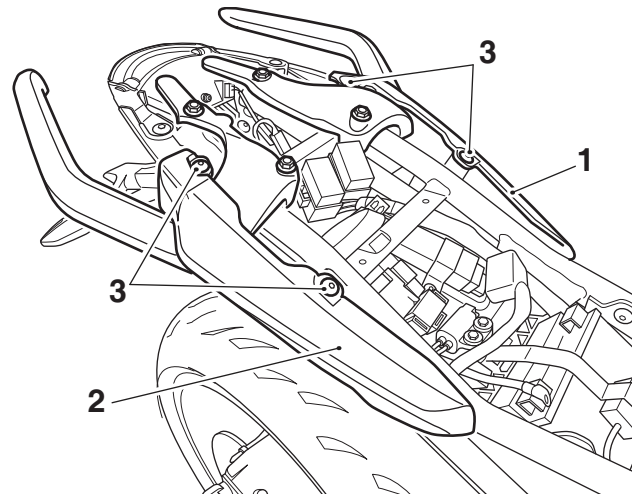


1. Rear body panel, left hand
2. Rear body panel, right hand
3. Fixings

4. Remove the left hand and right hand grab rails. Retain the grab rails for reuse if the motorcycle is to be returned to its original condition. Retain the fixings for reuse.

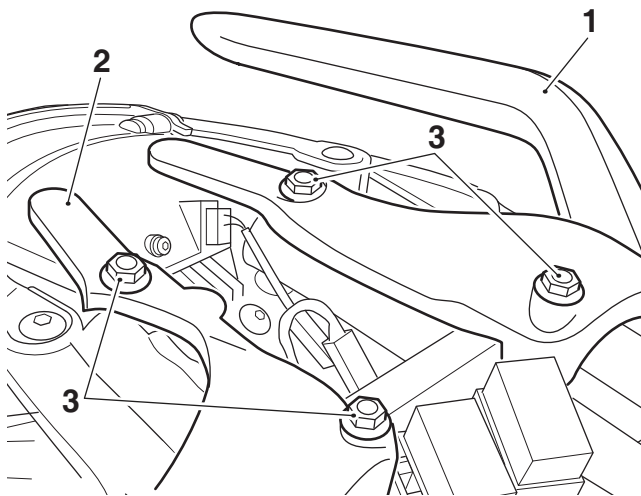


1. Grab rail, left hand
2. Grab rail, right hand
3. Fixings

5. Remove the undertray moulding left hand and right hand infill panel fixings. Retain the fixings for reuse.

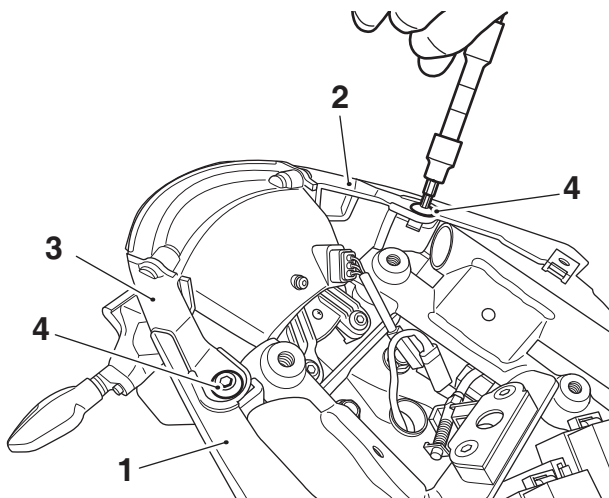


1. Undertray moulding
2. Infill panel, left hand
3. Infill panel, right hand
4. Fixings

6. Remove the left hand and right hand infill panels from the undertray moulding. Retain the infill panels for reuse if the motorcycle is to be returned to its original condition.

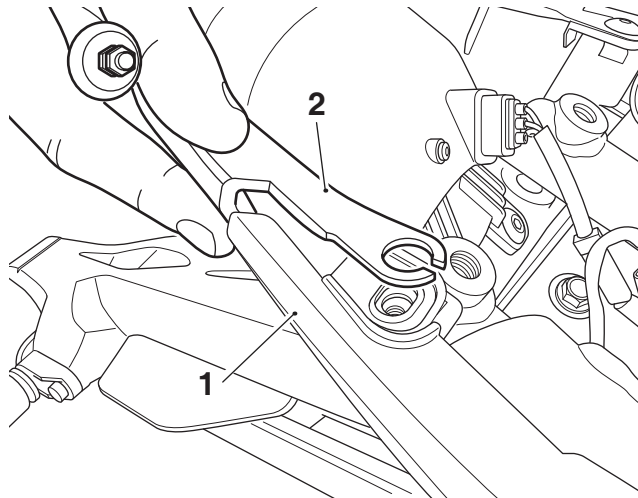


1. Undertray moulding
2. Infill panel, right hand side shown

7. Refit the infill panel fixings in to the undertray moulding. Do not fully tighten the fixings at this stage.

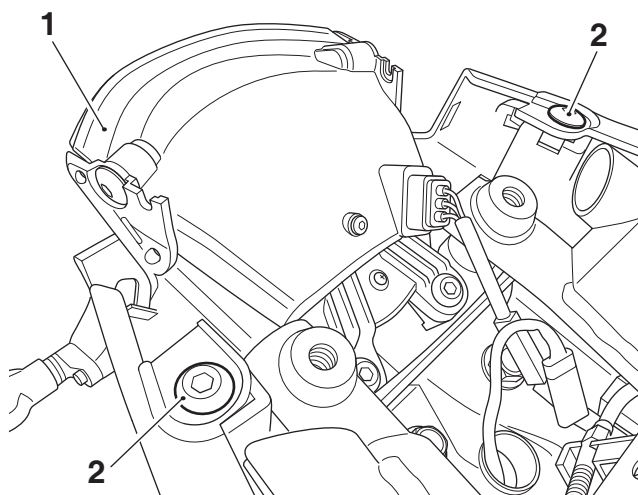


1. Undertray moulding
2. Fixings

8. Loosen the undertray moulding left hand and right hand lower fixings. Do not remove the fixings.

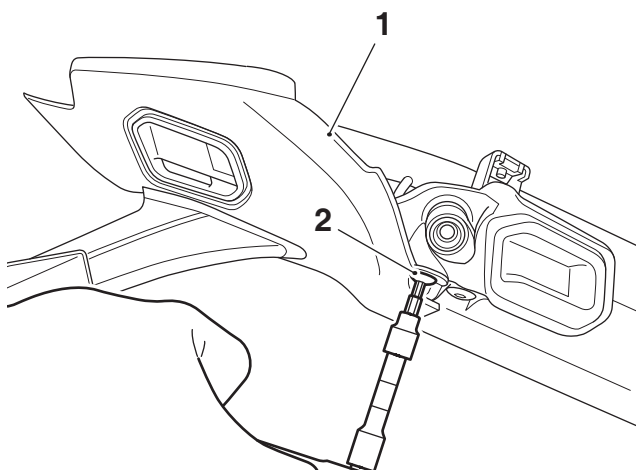

1. Undertray moulding
2. Lower fixings, right hand side shown

9. Position the luggage rack on to the motorcycle making sure the fixing positions are aligned with the original grab rail mountings.

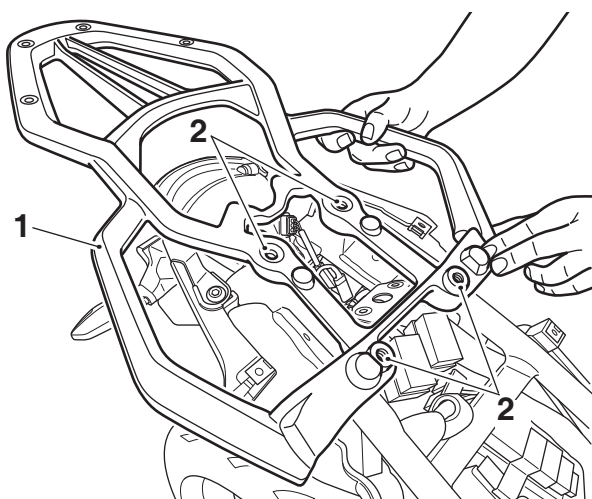

1. Luggage rack
2. Fixing positions


Note:

- The original grab rail M8 x 55 mm fixings must be fitted to the luggage rack front mount positions. The original grab rail M8 x 35 mm fixings must be fitted to the luggage rack rear mount positions.

10. Fit the original grab rail fixings to secure the luggage rack to the motorcycle. Tighten each fixing, in the sequence detailed below, to **35 Nm**.


Once each fixing is fully tightened, re-check the torque figure to confirm it is **35 Nm** for each fixing following the same tightening sequence.

Fixing Tightening Sequence

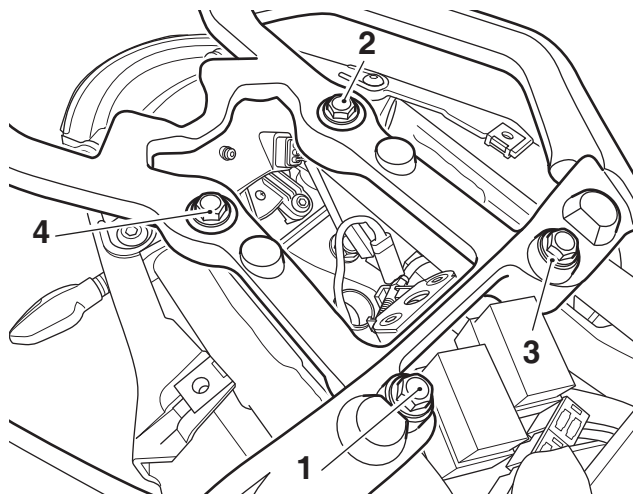


1. Tighten first (fixing, M8 x 55 mm)
2. Tighten second (fixing, M8 x 35 mm)
3. Tighten third (fixing, M8 x 55 mm)
4. Tighten last (fixing, M8 x 35 mm)

11. Align the undertray moulding centrally around the luggage rack.

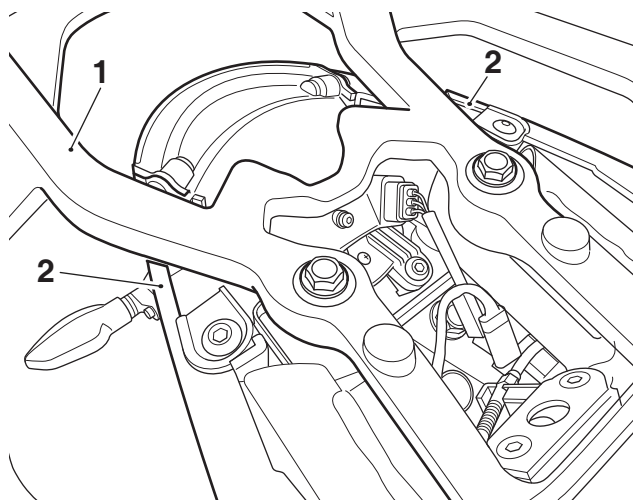


1. Luggage rack
2. Undertray moulding

12. Tighten the upper undertray moulding fixings to **3 Nm**.

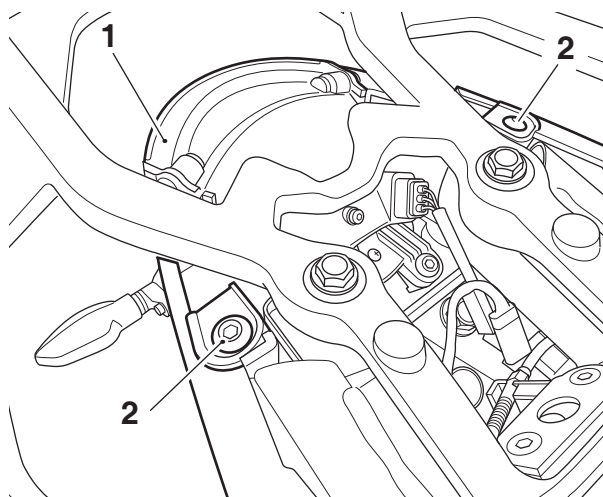


1. Undertray moulding
2. Upper fixings

13. Tighten the undertray lower fixings to **3 Nm**.

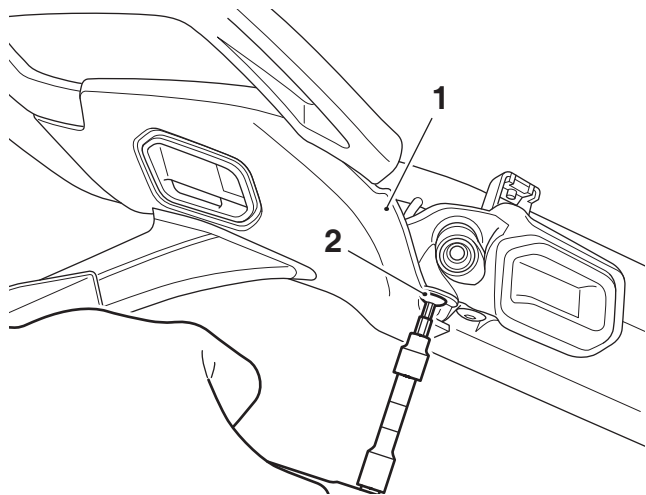


1. Undertray moulding
2. Lower fixings, right hand side shown

14. Position the right hand rear body panel over the luggage rack, as shown.

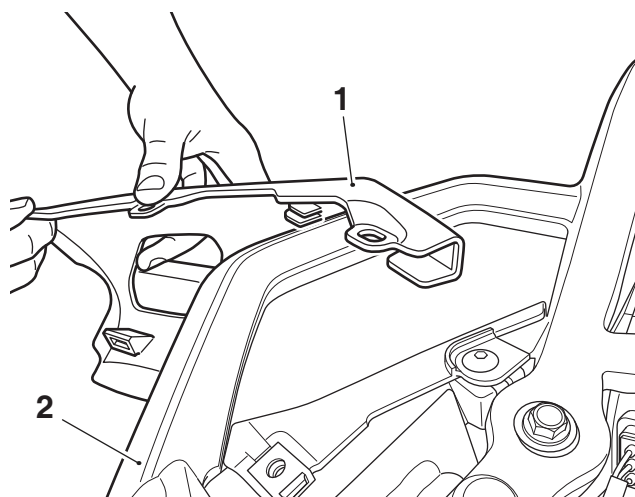


1. Rear body panel, right hand
2. Luggage rack

15. Locate the lower retaining feature on the inside of the rear body panel on to the undertray moulding.

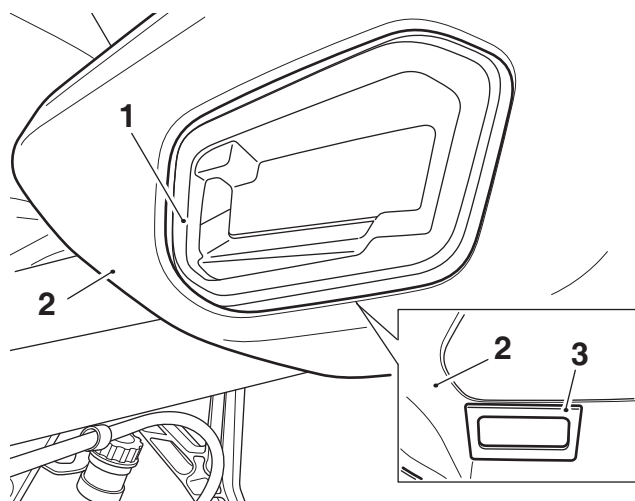

1. Undertray moulding
2. Rear body panel
3. Lower retaining feature

16. Refit the original rear body panel fixings and tighten to **3 Nm**.

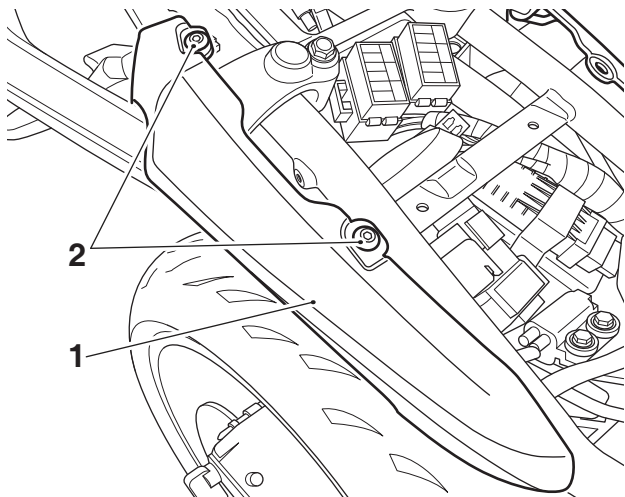


1. Rear body panel, right hand side
2. Fixings

17. Repeat steps 14 to 16 for the left hand rear body panel.

Note:

- If the luggage rack is to be fitted without an accessory top box mount, continue from step 18.
 - If an accessory top box mount is to be fitted together with the luggage continue from step 19.
18. Fit the firtree plugs from the kit into the threaded holes in the luggage rack, as shown.

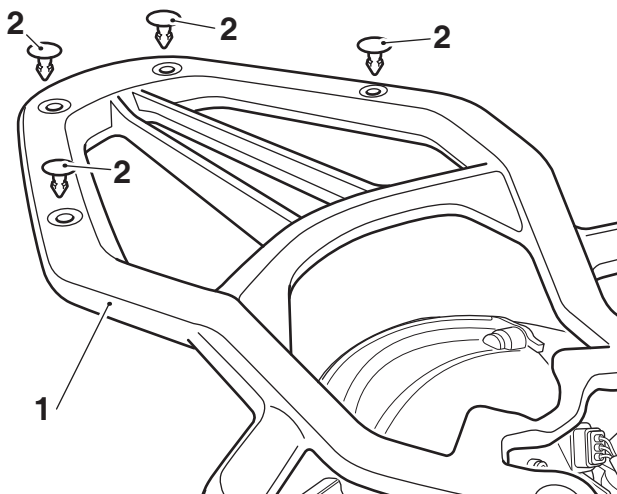

1. Luggage rack
2. Firtree plugs

19. Reconnect the battery, as described in the Service Manual.
20. Refit the seat as described in the Service Manual.



Warning

Always make sure that any load carried on the luggage rack is correctly secured such that it will not move around while the motorcycle is in motion.

An adhesive label on the luggage rack details the maximum safe load for the luggage rack, which is 5 kg (11 lbs).

Incorrect loading may result in an unsafe riding condition, which may result in loss of motorcycle control and an accident.



Warning

If, after fitment of this accessory kit, you have any doubt about the performance of any aspect of the motorcycle, contact an authorised Triumph dealer and do not ride the motorcycle until the authorised dealer has declared it fit for use. Riding a motorcycle when there is any doubt as to any aspect of the performance of the motorcycle may result in loss of control of the motorcycle leading to an accident.



Warning

This motorcycle must not be operated above the legal road speed limit except in authorised closed-course conditions.



Warning

Only operate this Triumph motorcycle at high speed in closed-course, on-road competition or on closed-course racetracks. High-speed operation should only be attempted by riders who have been instructed in the techniques necessary for high-speed riding and are familiar with the motorcycle's characteristics in all conditions.

High-speed operation in any other circumstances is dangerous and will lead to loss of motorcycle control and an accident.