

English

Fitting Instructions:

Speed Triple 1050 from VIN 461332 and Speed Triple 1050 R


A9510079 and A9510080

Thank you for choosing this Triumph genuine accessory kit. This accessory kit is the product of Triumph's use of proven engineering, exhaustive testing, and continuous striving for superior reliability, safety and performance.

Completely read all of these instructions before commencing the installation of the accessory kit in order to become thoroughly familiar with the kit's features and the installation process.

These instructions should be considered a permanent part of your accessory kit, and should remain with it even if your accessory-equipped motorcycle is subsequently sold.

A9510080 and A9510079

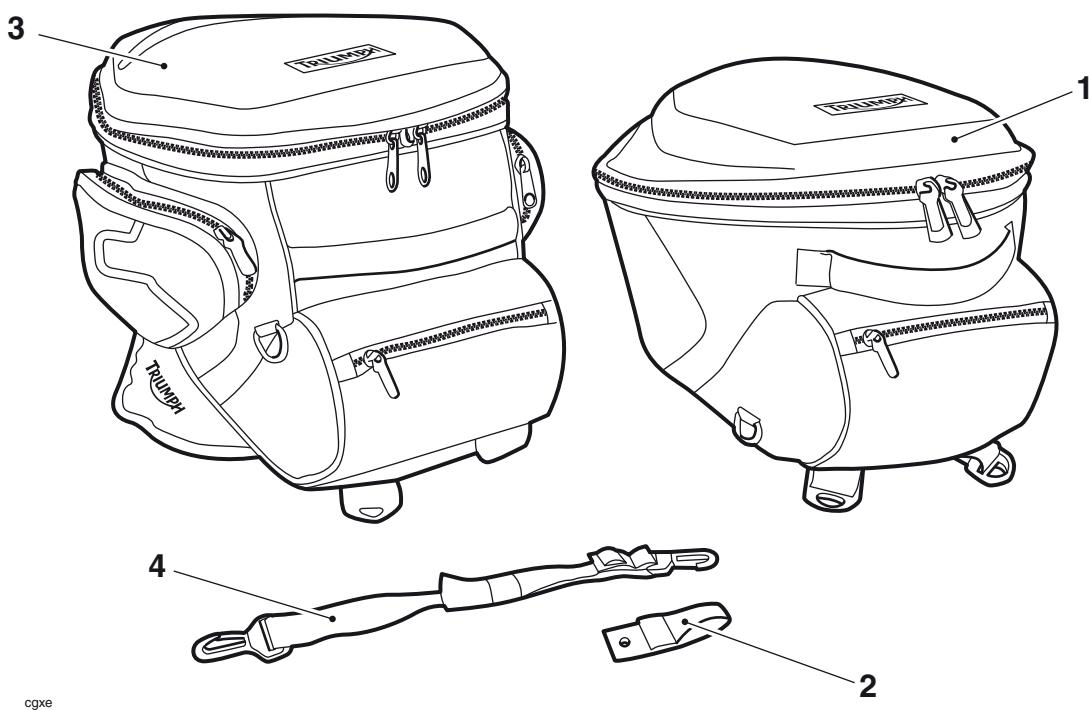

cgxe

Parts Supplied:

1. Tank bag, 16 - 20 litres, kit A9510080	1 off	3. Tank bag, 20 - 30 litres, kit A9510079	1 off
2. Anchor strap	1 off	4. Strap	1 off



Warning

This accessory kit is designed for use on Triumph Speed Triple 1050 from VIN 461332 and Speed Triple 1050 R motorcycles only and should not be fitted to any other manufacturer's motorcycle. Fitting this accessory kit to any other manufacturer's motorcycle will affect the performance, stability and handling of the motorcycle. This may affect the rider's ability to control the motorcycle and could cause an accident.



Warning

Always have Triumph approved parts, accessories and conversions fitted by a trained technician of an authorised Triumph dealer. The fitment of parts, accessories and conversions by a technician who is not of an authorised Triumph dealer may affect the handling, stability or other aspects of the motorcycle's operation which may result in loss of motorcycle control and an accident.



Warning

Throughout this operation, ensure that the motorcycle is stabilised and adequately supported to prevent risk of injury from the motorcycle falling.



Warning


A torque wrench of known accurate calibration must be used when fitting this accessory kit. Failure to tighten any of the fasteners to the correct torque specification may result in loss of motorcycle control and an accident.

Note:

- Ensure that both the underside of the tank bag and the outside of the fuel tank are clean and dry prior to fitting the tank bag.**

Installing the Tank Bag Front Anchor Strap


- Release the three fixings and remove the front panel from the fuel tank. Retain the front panel and its fixings for re-use.

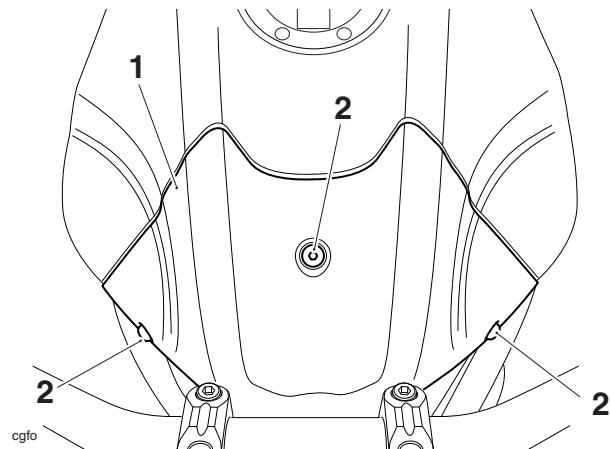

1. Front panel

2. Fixings


- Remove the fixing for the headstock infill panel. Retain the fixing for re-use.

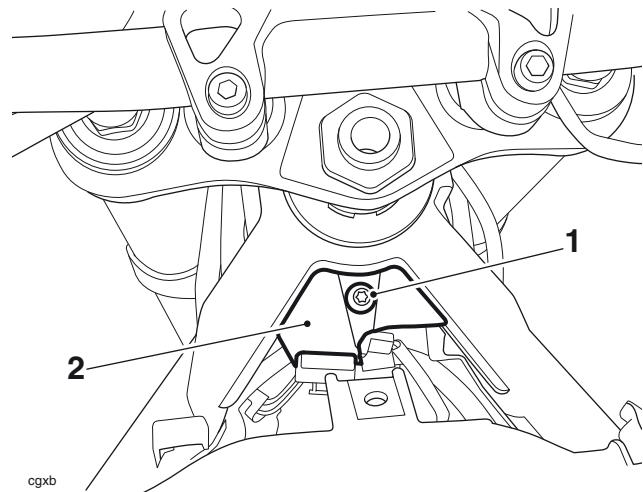

1. Fixing

2. Infill panel

3. Collect the anchor strap from the kit and position it on top of the infill panel. Secure it in position with the original screw and tighten to **4 Nm**.

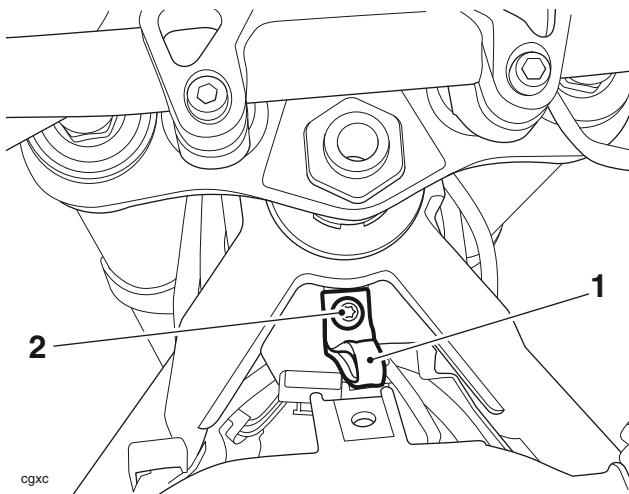

1. Anchor strap

2. Fixing


4. Refit the front panel to the fuel tank, with the anchor strap on the outside, and tighten the fixings to **2 Nm**.

Installing the Tank Bag

Warning

Remove all shoulder straps from the tank bag before mounting the tank bag to the motorcycle. Operation of the motorcycle with the shoulder straps fitted may result in loss of motorcycle control and an accident.


1. Position the tank bag onto the fuel tank such that the magnetic fixings follow the contours of the fuel tank.

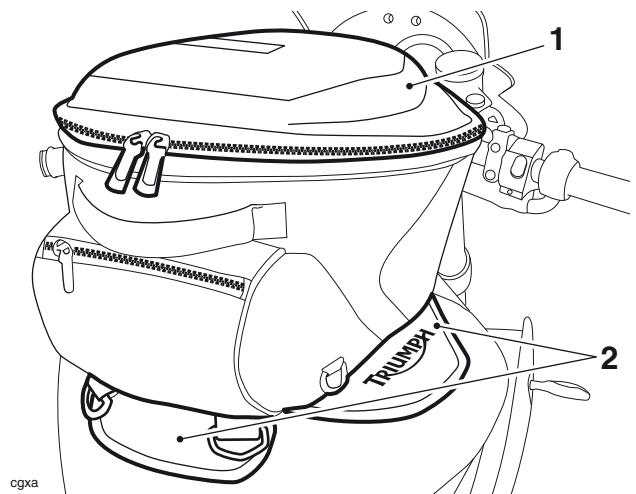

1. Tank bag

2. Magnetic fixings

2. Collect the fixing strap from the kit, feed it through the anchor strap and attach its ends to the D-loops at the front of the tank bag.

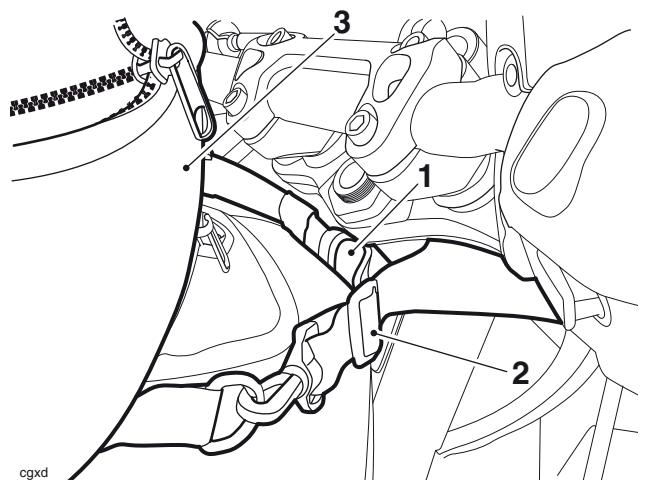

1. Anchor strap

2. Strap

3. Tank bag

3. Ensure the fixing strap is tight, adjust the strap if necessary.



Warning

Ensure the tank bag does not restrict the movement of the steering or cause any cables or wiring harnesses to bind.

Move the handlebars to left and right full lock while checking that cables and wiring harnesses do not bind. A cable or harness which binds will restrict the steering. Any restriction of the steering may cause loss of control and an accident.



Warning

Never ride an accessory equipped motorcycle at speeds above 80 mph (130 km/h). The presence of accessories will cause changes in the stability and handling of the motorcycle. Failure to allow for changes in motorcycle stability may lead to loss of control or an accident. Remember that the 80 mph (130 km/h) limit will be reduced by the fitting of non-approved accessories, incorrect loading, worn tyres, overall motorcycle condition and poor road or weather conditions.



Warning

The maximum safe load for the tank bag is 3 kg (6.6 lbs). Never exceed this loading limit as this may cause instability leading to loss of motorcycle control and an accident.



Warning

The motorcycle must not be operated above the legal road speed limit except in closed-course conditions.



Warning

After fitting the accessory kit the motorcycle will exhibit new handling characteristics. Operate the motorcycle in a safe area free from traffic to gain familiarity with any new characteristics. Operation of the motorcycle when not familiar with any new handling characteristics may result in loss of motorcycle control and an accident.



Warning

Only operate this Triumph motorcycle at high speed in closed-course on road competition or on closed-course race tracks. High speed operation should only be attempted by riders who have been instructed in the techniques necessary for high speed riding and are familiar with the motorcycle's characteristics in all conditions. High speed operation in any other circumstances is dangerous and will lead to loss of motorcycle control and an accident.



Warning

If, after fitment of this accessory kit, you have any doubt about the performance of any aspect of the motorcycle, contact an authorised Triumph dealer and do not ride the motorcycle until the authorised dealer has declared it fit for use. Riding a motorcycle when there is any doubt as to any aspect of the performance of the motorcycle may result in loss of control of the motorcycle leading to an accident.