


Fitting Instructions: Trophy and Trophy SE A9510095

Thank you for choosing this Triumph genuine accessory kit. This accessory kit is the product of Triumph's use of proven engineering, exhaustive testing, and continuous striving for superior reliability, safety and performance.

Completely read all of these instructions before commencing the installation of the accessory kit in order to become thoroughly familiar with the kit's features and the installation process.

These instructions should be considered a permanent part of your accessory kit, and should remain with it even if your accessory equipped motorcycle is subsequently sold.

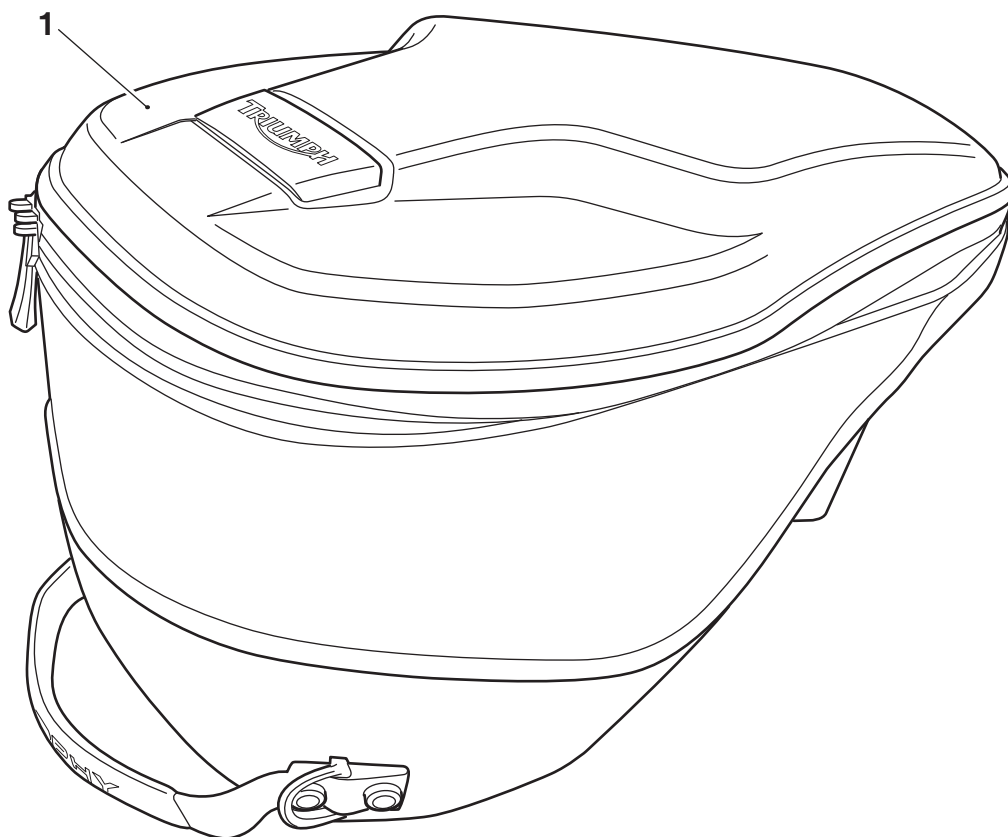

Parts Supplied:

1. Tank bag, 15 litre	1 off		
The following parts are packed inside the tank bag:			
2. Rain cover	1 off	6. Retaining plate	1 off
3. Map case	1 off	7. Self-tapping screw - M4	1 off
4. Single shoulder strap	1 off	8. Self-adhesive pad	1 off
5. Front strap	1 off	9. Cleaning wipe	1 off



Warning

This accessory kit is designed for use on Triumph Trophy and Trophy SE motorcycles only and should not be fitted to any other manufacturer's motorcycle. Fitting this accessory kit to any other manufacturer's motorcycle will affect the performance, stability and handling of the motorcycle. This may affect the rider's ability to control the motorcycle and could cause an accident.



Warning

Always have Triumph approved parts, accessories and conversions fitted by a trained technician of an authorised Triumph dealer. The fitment of parts, accessories and conversions by a technician who is not of an authorised Triumph dealer may affect the handling, stability or other aspects of the motorcycle's operation, which may result in loss of motorcycle control and an accident.



Warning

Throughout this operation, ensure that the motorcycle is stabilised and adequately supported to prevent risk of injury from the motorcycle falling.



Warning

Install the tank bag only in the positions described below. Installation of the tank bag in any other position on the motorcycle will affect the handling, stability or other aspects of the motorcycle's operation, which may result in loss of motorcycle control and an accident.



Warning

Remove the shoulder strap from the tank bag before mounting to the motorcycle.


Operation of the motorcycle with the shoulder strap fitted may result in loss of motorcycle control and an accident.

Note:

- **When using the tank bag, always pack heavier items at the bottom of the bag.**

Installing the Tank Bag Front Strap Assembly

1. Place the motorcycle on the centre stand.
2. Remove the fuel tank centre panel, as described in the Service Manual.
3. Remove the three rubber blanking plugs from the fuel tank centre panel, carefully pressing the blanking plugs out from the rear of the panel. Retain the blanking plugs for use if the motorcycle is returned to the original condition, or the tank bag is removed for extended periods.

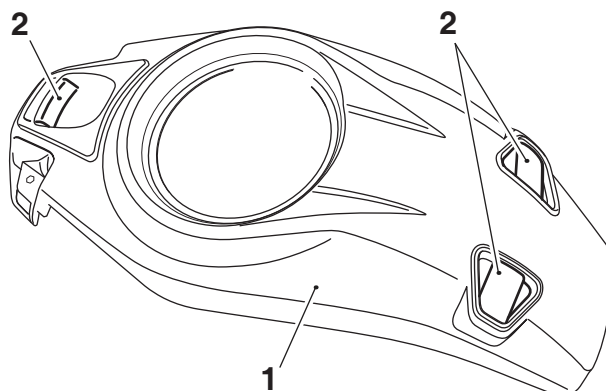

T1096

1. Fuel tank centre panel

2. Rubber blanking plug




Caution

When fitting self-adhesive parts care must be taken to ensure positioning is correct and accurate. Once the adhesive has been attached to the mounting surface, there is no satisfactory method of removal and re-positioning if incorrectly aligned. Initial bonding is instant, full bonding is achieved after 72 hours.

Note:

- **Read the warning notices printed on the cleaning wipe packet provided in the kit.**


4. Using the cleaning wipe provided in the kit, clean the recess at the front of the fuel tank centre panel.

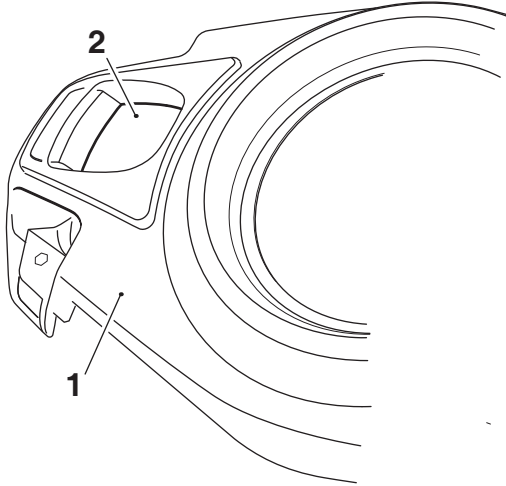

T1207

- 1. Fuel tank centre panel**
2. Recess


5. Peel the backing strip from the self-adhesive pad. Align the pad in the recess at the front of the fuel tank centre panel. Apply firm and even pressure on the pad to ensure a good bond is achieved.

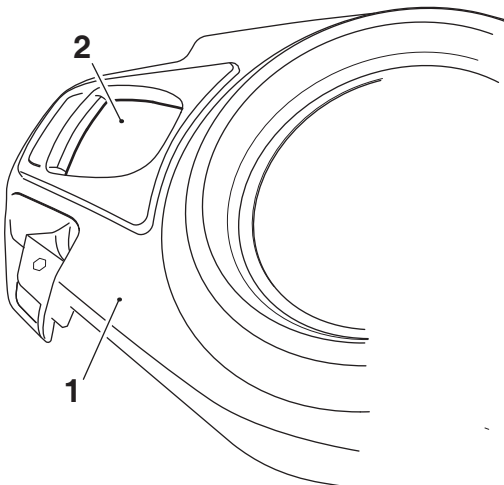

T1207a

- 1. Fuel tank centre panel**
2. Self-adhesive pad


6. Feed the loop end of the front strap, with the webbing side of the strap to the top, through the slot at the front of the fuel tank centre panel, as shown below.

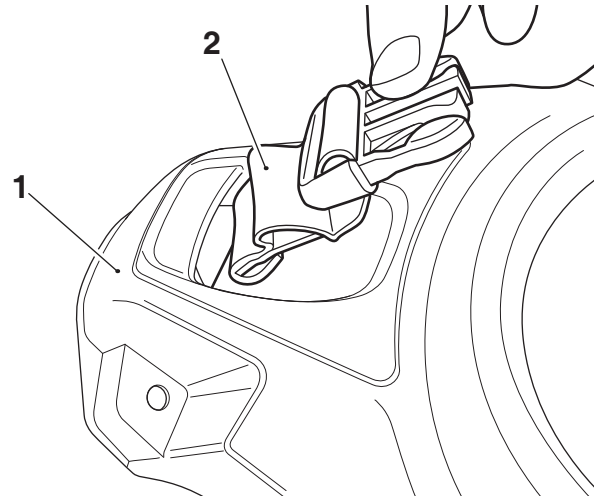

T1097

- 1. Fuel tank centre panel**
2. Front strap, webbing side


7. Turn the fuel tank centre panel over and pull the front strap through as far as possible.

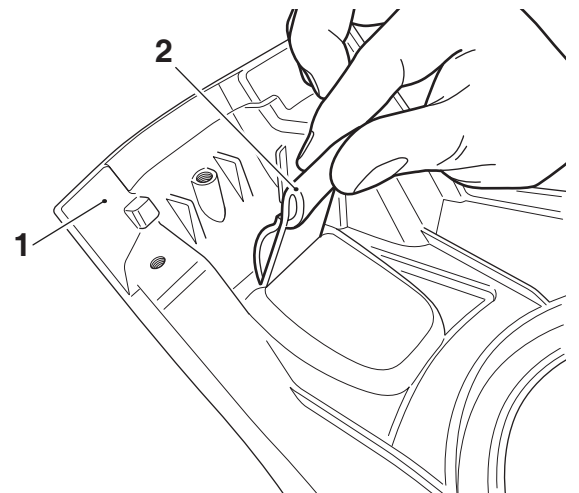

T1098

- 1. Fuel tank centre panel**
2. Front strap


8. Fold the end of the front strap and attach to the retaining plate, as shown below.

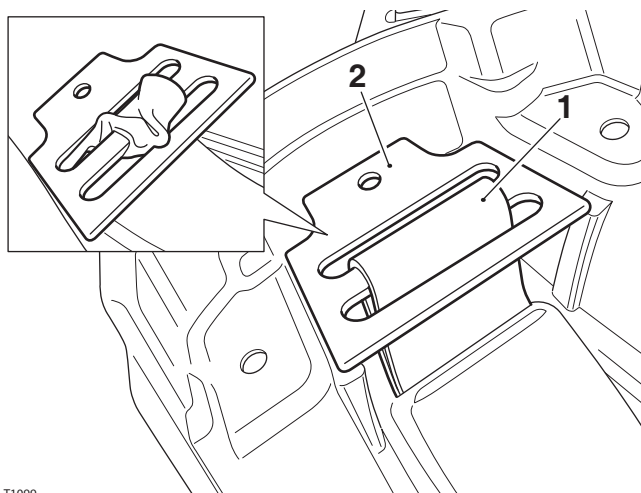

T1099

- 1. Front strap**
2. Retaining plate

9. Position the retaining plate on the fuel tank centre panel. Align the fixing hole with the screw location in the centre panel and retain with the M4 self-tapping screw from the kit. Tighten the screw to **3 Nm**.

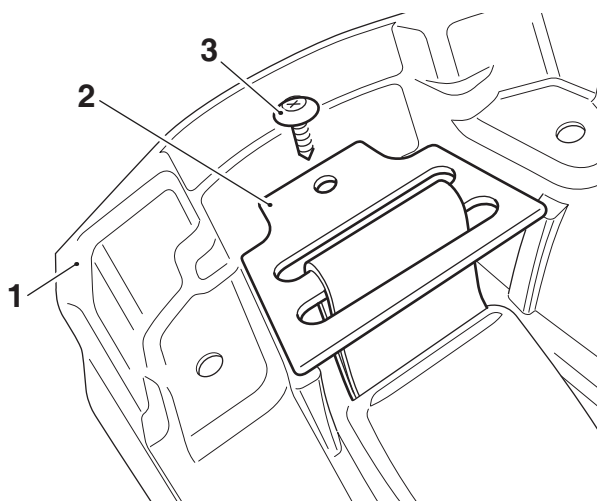


T1200

- 1. Fuel tank centre panel**
2. Retaining plate
3. M4 self-tapping screw

10. Re-fit the fuel tank centre panel, as described in the Service Manual.


11. Locate the two rear retaining hooks on the tank bag into the slots in the fuel tank centre panel.

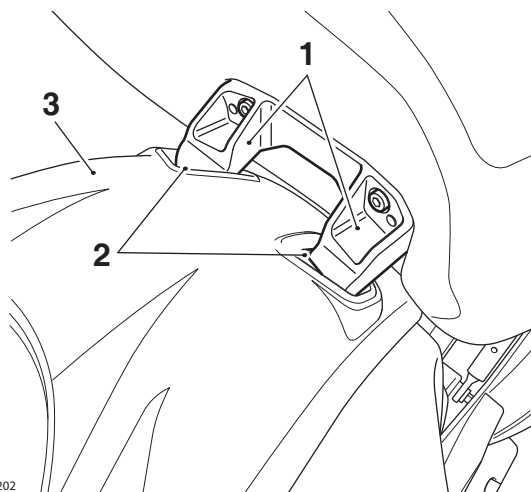

T1202

- 1. Retaining hook**
2. Slot
3. Fuel tank centre panel


12. Lower the front of the tank bag, ensuring the front boss on the tank bag sits correctly on the self-adhesive pad secured to the fuel tank centre panel.

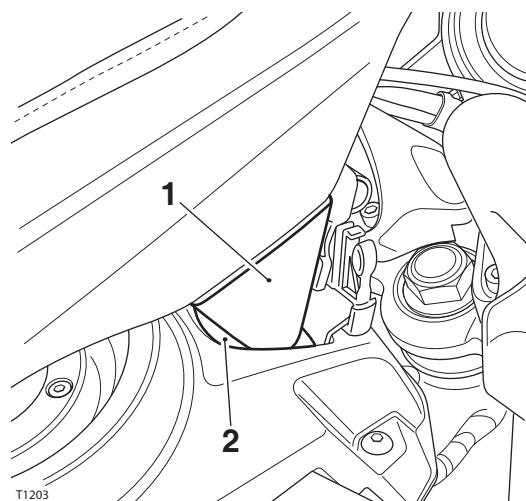

T1203

- 1. Front boss**
2. Self-adhesive pad

13. Adjust the strap attached to the tank bag and clip it into the front strap. Ensure the tank bag is held securely on the fuel tank.

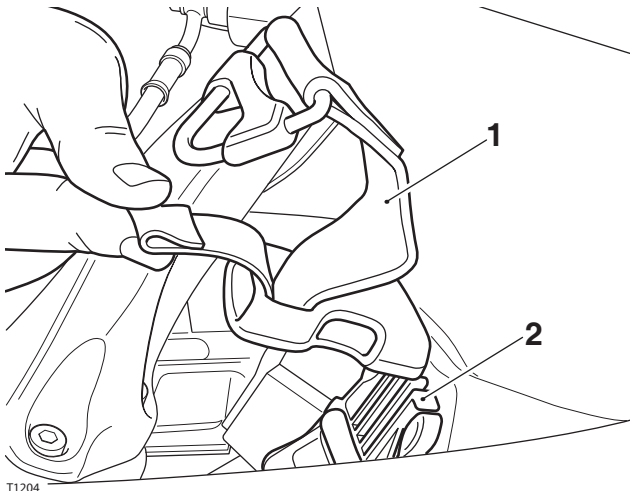


1. Strap - tank bag

2. Front strap

14. Check there is no significant side to side, or upwards movement of the tank bag. It should not be possible to lift the front boss away from the self-adhesive pad when the tank bag strap is adjusted correctly. If necessary re-adjust the tank bag strap.
15. Remove the motorcycle from the centre stand and place on the side stand.

Tank Bag Removal

16. Undclip the tank bag strap from the front strap assembly.
17. Lift the front of the tank bag and disengage the two rear retaining hooks from the slots in the fuel tank centre panel.

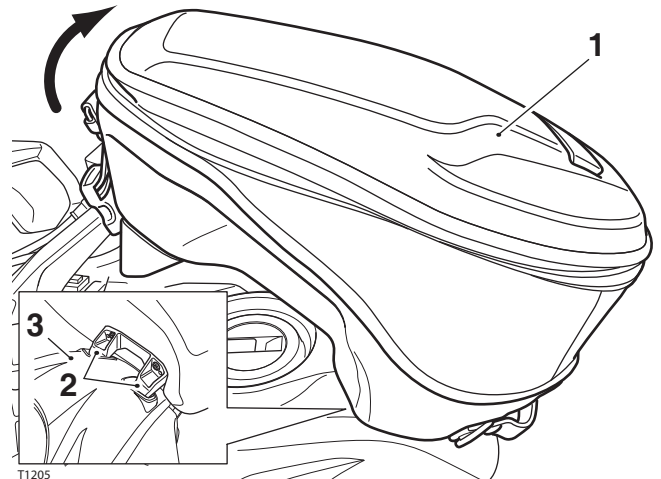

1. Tank bag

2. Slots

3. Fuel tank centre panel

Cleaning



Caution

Use of chemicals or high-pressure spray washers is not recommended for cleaning the tank bag. Using chemicals or pressure washers may damage the tank bag.

To help maintain its appearance, clean the tank bag using a sponge or cleaning cloth with low alkaline soap and water.



Warning

The maximum safe load for the tank bag is 3 kg (6.6 lbs). Never exceed this loading limit as this may cause the motorcycle to become unstable leading to loss of control and an accident.



Warning

After fitting the accessory kit the motorcycle will exhibit new handling characteristics. Operate the motorcycle in a safe area free from traffic to gain familiarity with any new characteristics. Operation of the motorcycle when not familiar with any new handling characteristics may result in loss of motorcycle control and an accident.



Warning

Never ride an accessory equipped motorcycle at speeds above 80 mph (130 km/h).

The presence of accessories will cause changes in the stability and handling of the motorcycle. Failure to allow for changes in motorcycle stability may lead to loss of control or an accident.

Remember that the 80 mph (130 km/h) limit will be reduced by the fitting of non-approved accessories, incorrect loading, worn tyres, overall motorcycle condition and poor road or weather conditions.



Warning

The motorcycle must not be operated above the legal road speed limit except in closed-course conditions.



Warning

Only operate this Triumph motorcycle at high speed in closed-course on road competition or on closed-course racetracks. High speed operation should only be attempted by riders who have been instructed in the techniques necessary for high speed riding and are familiar with the motorcycle's characteristics in all conditions.

High speed operation in any other circumstances is dangerous and will lead to loss of motorcycle control and an accident.