



Accessory Fitting Instructions


Tail Pack Harness	
Kit number	Models Affected
A9510164	Speed Triple S, Speed Triple R, Speed Triple RS
To be used with Tail Pack, 10-15 litre, A9510249	

Thank you for choosing this Triumph genuine accessory kit. This accessory kit is the product of Triumph's use of proven engineering, exhaustive testing, and continuous striving for superior reliability, safety and performance.

Completely read all of these instructions before commencing the installation of the accessory kit in order to become thoroughly familiar with the kit's features and the installation process.


These instructions should be considered a permanent part of your accessory kit, and should remain with it even if your accessory equipped motorcycle is subsequently sold.

Parts supplied: A9510164

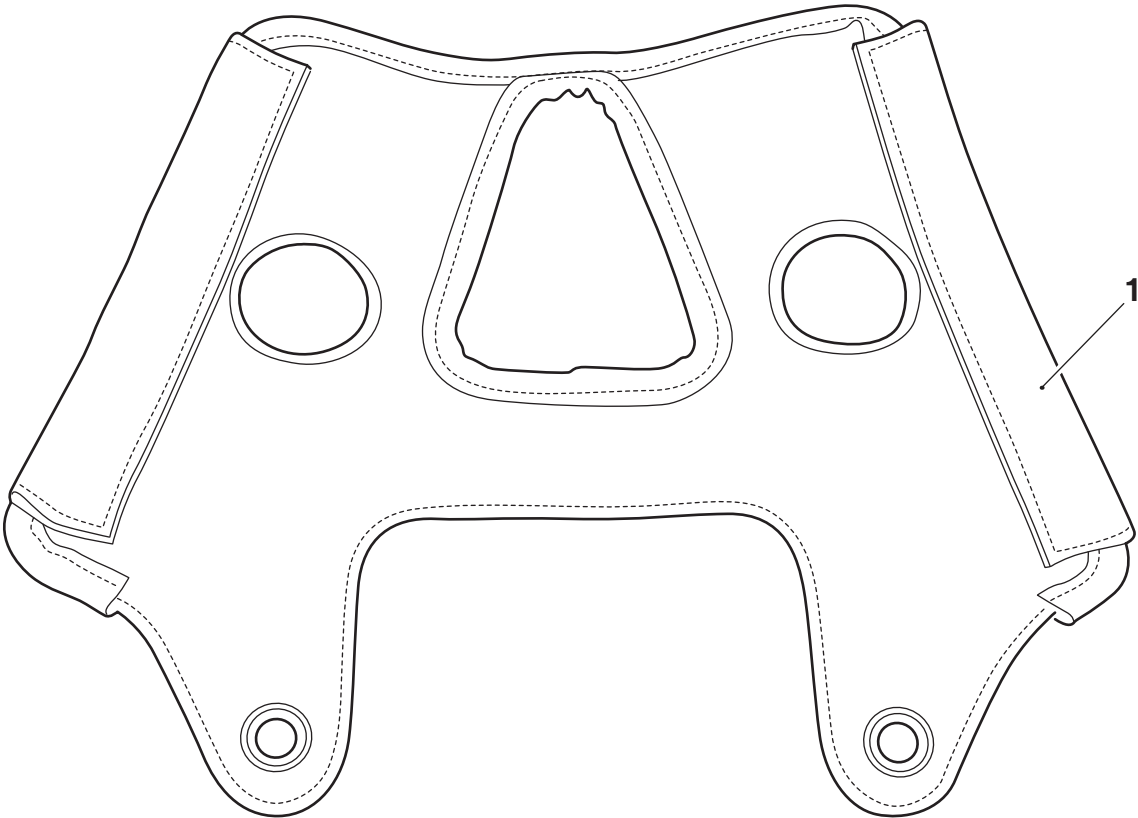

1. Tail pack harness	1 off		
----------------------	-------	--	--

Parts supplied: A9510249

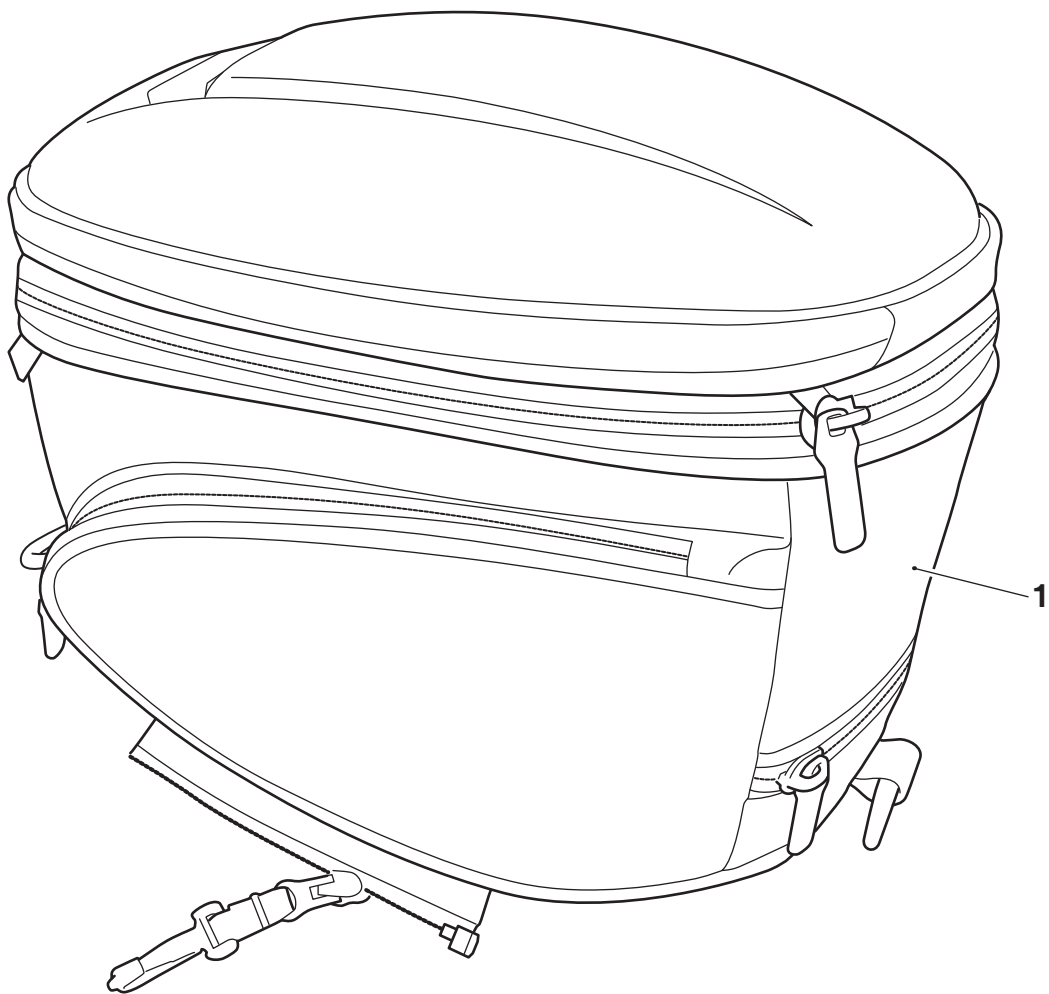

1.	Tail pack, 10 - 15 litre	1 off		
----	--------------------------	-------	--	--



Warning

The accessory kits covered in this instruction are designed for use on specific models of Triumph motorcycle. The accessory kits and the models applicable are listed at the start of the instruction. They should not be fitted to any other Triumph model or to any other manufacturer's motorcycle. Fitting an accessory kit to a Triumph model not listed, or to any other manufacturer's motorcycle will affect the performance, stability and handling of the motorcycle. This may affect the rider's ability to control the motorcycle and could cause an accident.



Warning

Always have Triumph approved parts, accessories and conversions fitted by a trained technician of an authorised Triumph dealer. The fitment of parts, accessories and conversions by a technician who is not of an authorised Triumph dealer may affect the handling, stability or other aspects of the motorcycle's operation which may result in loss of motorcycle control and an accident.



Warning

Throughout this operation, ensure that the motorcycle is stabilised and adequately supported to prevent risk of injury from the motorcycle falling.



Warning

A torque wrench of known accurate calibration must be used when fitting this accessory kit. Failure to tighten any of the fasteners to the correct torque specification may affect motorcycle performance, handling and stability. This may result in loss of motorcycle control and an accident.



Warning

Install the tail pack only in the positions described below. Installation of the tail pack in any other position on the motorcycle will affect the handling, stability or other aspects of the motorcycle's operation which may result in loss of motorcycle control and an accident.



Warning

Remove the shoulder strap(s) from the tail pack before mounting to the motorcycle.

Operation of the motorcycle with the shoulder strap(s) fitted may result in loss of motorcycle control and an accident.

Note:

- Triumph offers a broad range of approved genuine accessories for your motorcycle. We cannot therefore cover all possible equipment variations in these instructions. For removal and installation of Triumph Genuine Accessories, always refer to the instructions supplied with the respective accessory kit. To obtain additional copies of any Triumph accessory instructions, visit www.triumphinstructions.com or contact your authorised Triumph dealer.

Note:


- When using the tail pack, always pack heavier items at the bottom of the bag.
- Ensure the underside of the tail pack is clean and dry prior to fitting.

Installing the Tail Pack Harness A9510164

- Place the motorcycle on a paddock stand.
- Remove the passenger seat, as described in the Owner's Handbook.

Note:

- When fitting the tail pack harness, ensure the zips are not visible when viewed from the underside of the passenger seat, as shown below.

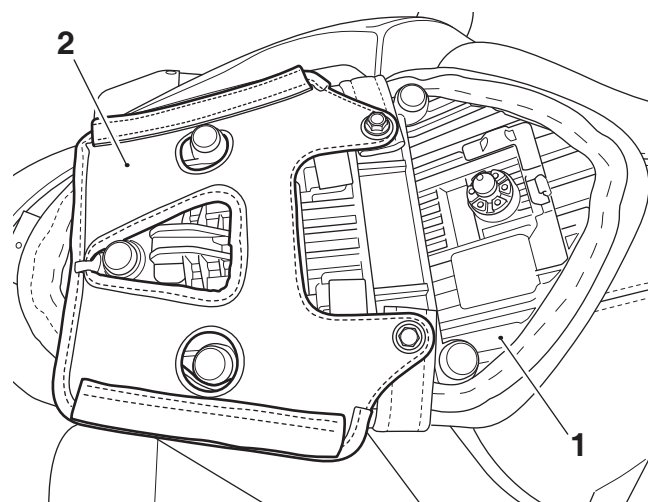


- Passenger seat, underside
- Tail pack harness



Warning


The seat strap must be refitted when installing the tail pack harness. The seat strap is required for the safe carriage of a passenger. A passenger who is not able to hold on to a seat strap will be unable to sit securely on the motorcycle and may cause instability leading to loss of control and an accident.

3. Remove the two screws and washers securing the seat strap to the passenger seat. Leave the seat strap in position on the passenger seat. Retain the screws and washers for re-use.

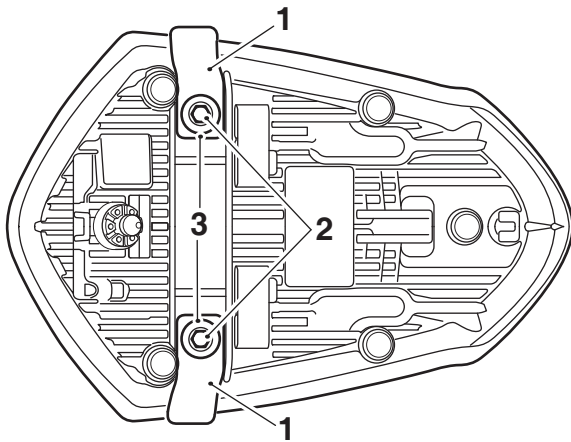


1. Seat strap
2. Screw
3. Washer

4. Fit the short strap on the tail pack harness under the tab on the rear of the passenger seat, as shown.

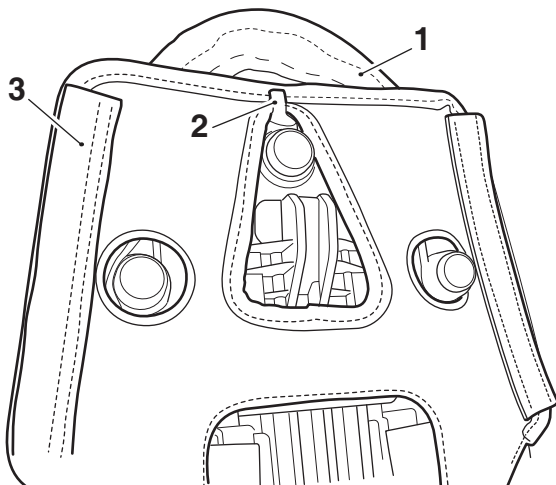


1. Passenger seat
2. Tab
3. Tail pack harness strap

5. With the seat strap positioned under the tail pack harness, fit one of the original screws with a washer through the tail pack harness and seat strap, as shown.

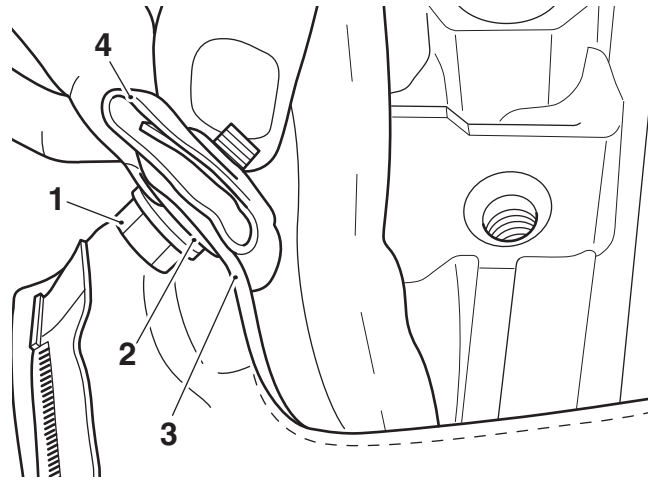

1. Screw
2. Washer
3. Tail pack harness (left hand shown)
4. Seat strap


6. Repeat step 5 for the opposite side.
7. Fit the screws into the seat strap fixing points on the passenger seat to secure the seat strap and tail pack harness. Tighten the screws to **7 Nm**.

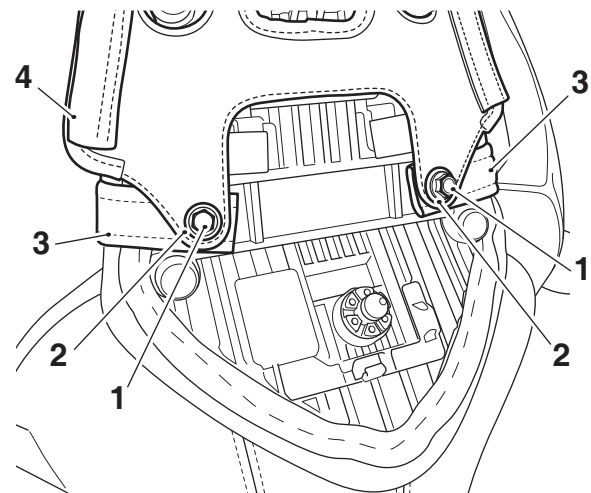

1. Screw
2. Washer
3. Seat strap
4. Tail pack harness


Installing the Tail Pack A9510249

1. Position the tail pack on the passenger seat and retain to the harness with the two zips.

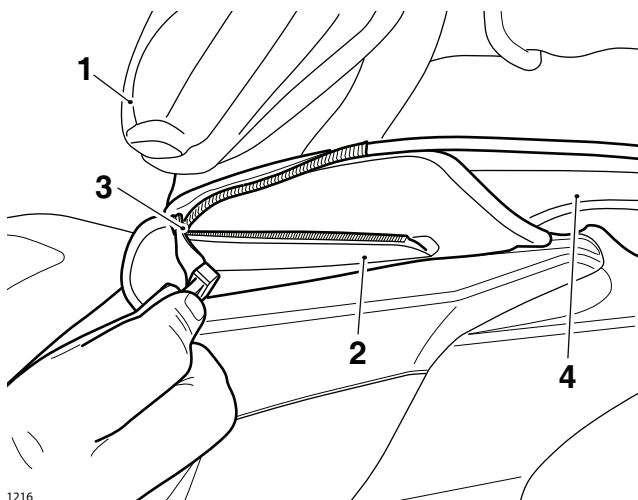

1. Tail pack
2. Tail pack harness (right hand shown)
3. Zip
4. Passenger seat


2. Always ensure the quick release fasteners are fastened on to the D-loops, as shown below.

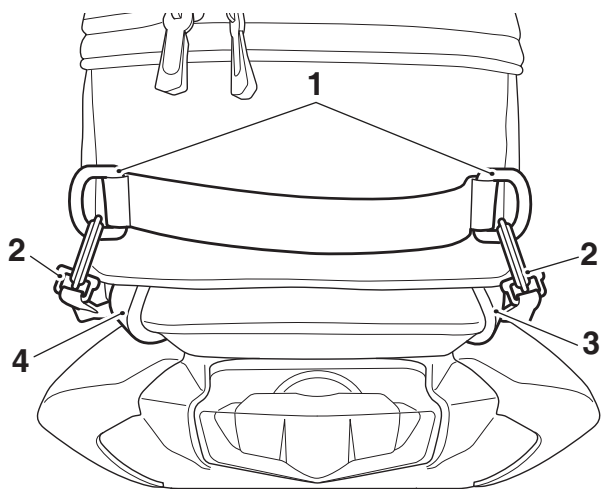

1. D-loops
2. Quick release fastener
3. Tail pack harness (right hand)
4. Tail pack harness (left hand)

Installing the Rain Cover

3. Position the rain cover over the tail pack, as shown below.

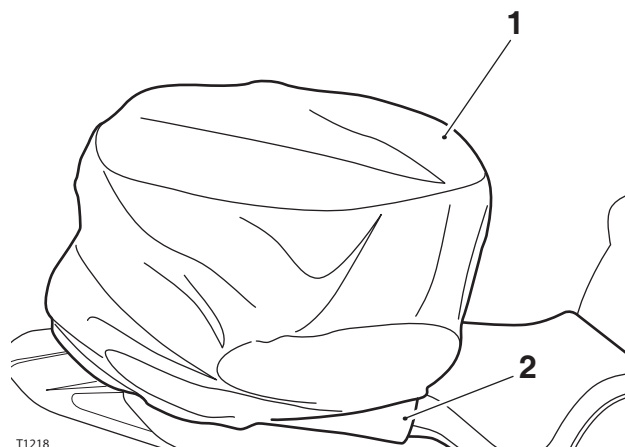

1. Rain cover
2. Tail pack

Cleaning



Caution

Use of chemicals or high-pressure spray washers is not recommended for cleaning the tail pack. Using chemicals or pressure washers may damage the tail pack.

To help maintain its appearance, clean the tail pack using a sponge or cleaning cloth with low alkaline soap and water.



Warning

The maximum safe load for the tail pack is 3 kg (6.6 lbs). Never exceed this loading limit as this may cause the motorcycle to become unstable leading to loss of control and an accident.



Warning

After fitting the accessory kit the motorcycle will exhibit new handling characteristics. Operate the motorcycle in a safe area free from traffic to gain familiarity with any new characteristics. Operation of the motorcycle when not familiar with any new handling characteristics may result in loss of motorcycle control and an accident.



Warning

Never ride an accessory equipped motorcycle (including those fitted with Triumph approved windscreens and luggage systems) at speeds above 80 mph (130 km/h).

The presence of accessories such as windscreens and luggage systems will cause changes in the stability and handling of the motorcycle. Failure to allow for changes in motorcycle stability may lead to loss of control or an accident.

Remember that the 80 mph (130 km/h) limit will be reduced by the fitting of non-approved accessories, incorrect loading, worn tyres, overall motorcycle condition and poor road or weather conditions.



Warning

This motorcycle must not be operated above the legal road speed limit except in authorised closed-course conditions.



Warning

Only operate this Triumph motorcycle at high speed in closed-course on-road competition or on closed-course racetracks. High-speed operation should only be attempted by riders who have been instructed in the techniques necessary for high-speed riding and are familiar with the motorcycle's characteristics in all conditions.

High-speed operation in any other circumstances is dangerous and will lead to loss of motorcycle control and an accident.