



Accessory Fitting Instructions

Tail Pack Harness	
Kit number	Models Affected
A9510203	Street Triple S, Street Triple S 660 cc, Street Triple R from VIN 793032, Street Triple R LRH (Low Ride Height), Street Triple RS
To be used with Tail Pack, 10-15 litre, A9510249	

Note:


- For Street Triple RS models the Tail Pack Harness can only be used when a Triumph accessory passenger seat is fitted.

Thank you for choosing this Triumph genuine accessory kit. This accessory kit is the product of Triumph's use of proven engineering, exhaustive testing, and continuous striving for superior reliability, safety and performance.

Completely read all of these instructions before commencing the installation of the accessory kit in order to become thoroughly familiar with the kit's features and the installation process.


These instructions should be considered a permanent part of your accessory kit, and should remain with it even if your accessory equipped motorcycle is subsequently sold.

Parts supplied: A9510203

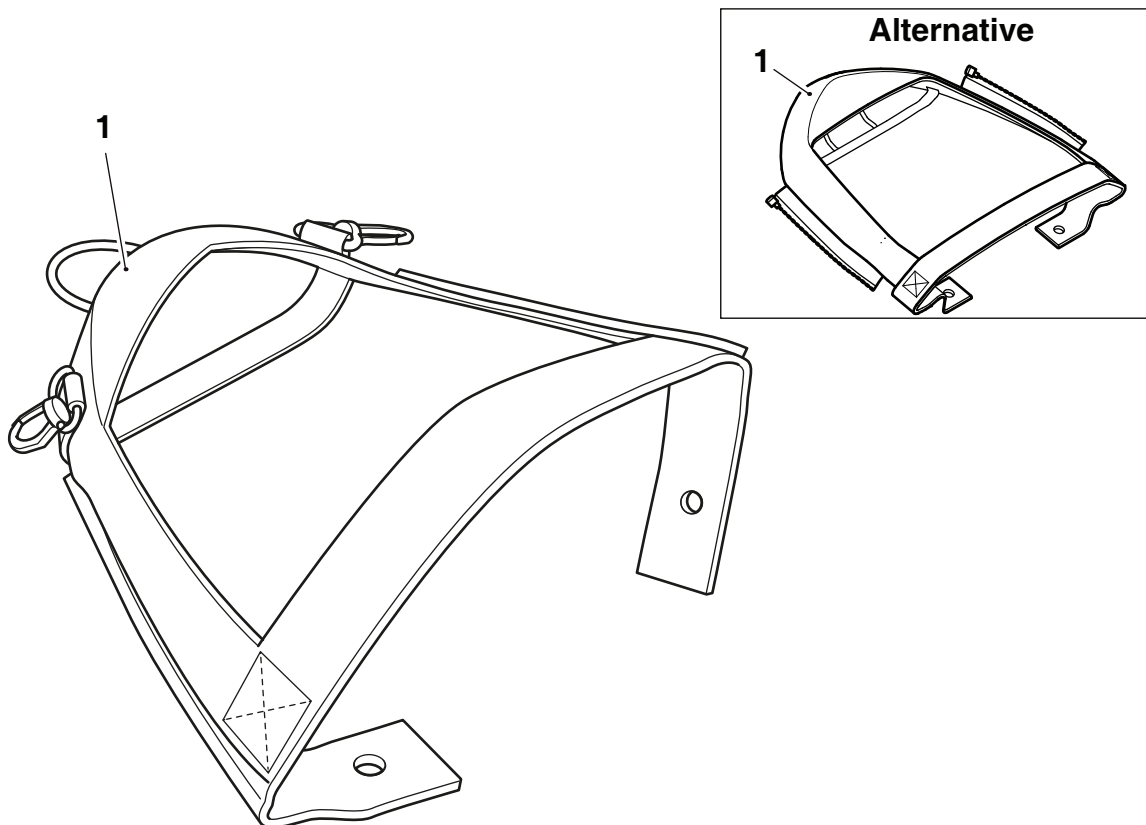

1. Tail pack harness	1 off	
----------------------	-------	--

Parts supplied: A9510249

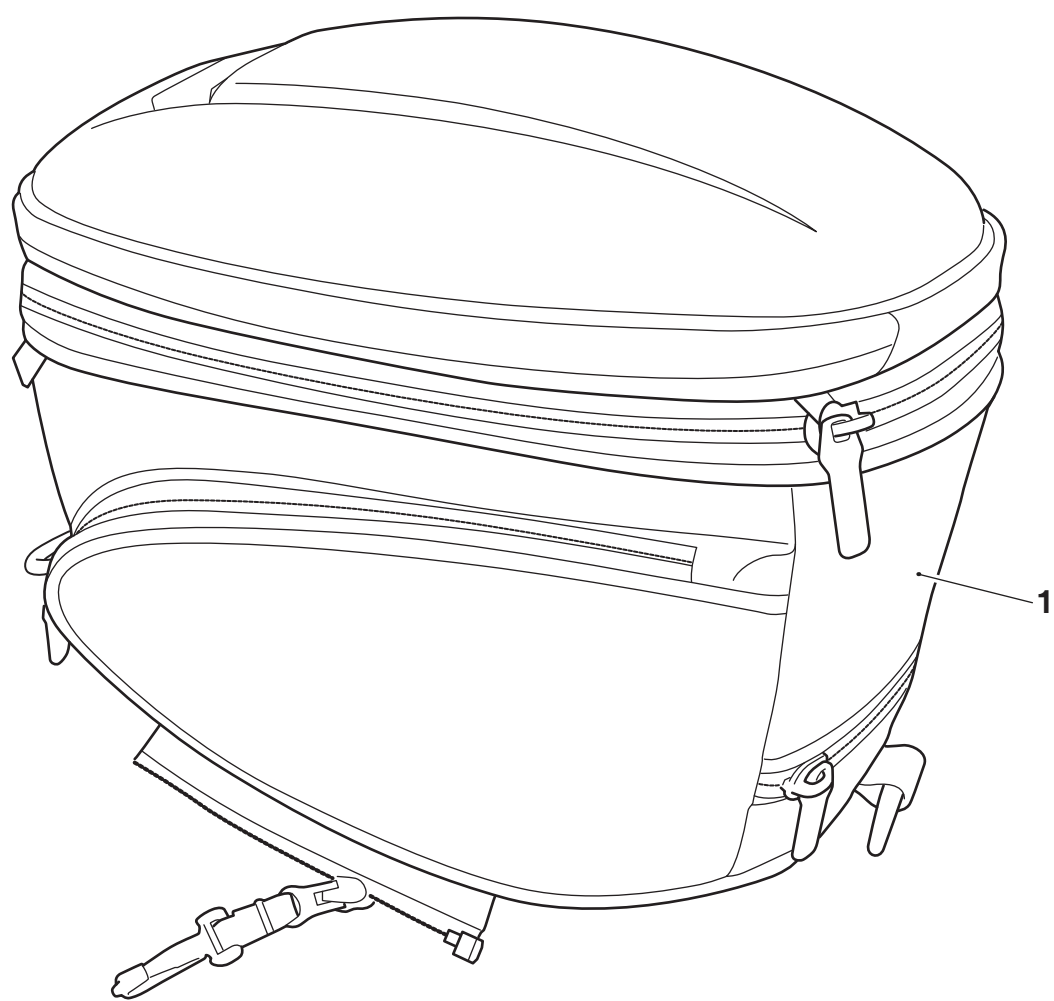

1.	Tail pack, 10 - 15 litre	1 off		
----	--------------------------	-------	--	--



Warning

The accessory kits covered in this instruction are designed for use on specific models of Triumph motorcycle. The accessory kits and the models applicable are listed at the start of the instruction. They should not be fitted to any other Triumph model or to any other manufacturer's motorcycle. Fitting an accessory kit to a Triumph model not listed, or to any other manufacturer's motorcycle will affect the performance, stability and handling of the motorcycle. This may result in loss of motorcycle control and an accident.



Warning

Always have Triumph approved parts, accessories and conversions fitted by a trained technician of an authorised Triumph dealer. The fitment of parts, accessories and conversions by a technician who is not of an authorised Triumph dealer may affect the handling, stability or other aspects of the motorcycle's operation which may result in loss of motorcycle control and an accident.



Warning

Throughout this operation, ensure that the motorcycle is stabilised and adequately supported to prevent risk of injury from the motorcycle falling.



Warning

A torque wrench of known accurate calibration must be used when fitting this accessory kit. Failure to tighten any of the fasteners to the correct torque specification may affect motorcycle performance, handling and stability. This may result in loss of motorcycle control and an accident.



Warning

Install the tail pack only in the positions described below. Installation of the tail pack in any other position on the motorcycle will affect the handling, stability or other aspects of the motorcycle's operation which may result in loss of motorcycle control and an accident.



Warning

Remove the shoulder strap(s) from the tail pack before mounting to the motorcycle.

Operation of the motorcycle with the shoulder strap(s) fitted may result in loss of motorcycle control and an accident.

Note:

- **Triumph offers a broad range of approved genuine accessories for your motorcycle. We cannot therefore cover all possible equipment variations in these instructions. For removal and installation of Triumph Genuine Accessories, always refer to the instructions supplied with the respective accessory kit. To obtain additional copies of any Triumph accessory instructions, visit www.triumphinstructions.com or contact your authorised Triumph dealer.**

Note:

- **When using the tail pack, always pack heavier items at the bottom of the bag.**
- **Ensure the underside of the tail pack is clean and dry prior to fitting.**

Installing the Tail Pack Harness


1. Remove the passenger seat, as described in the Owner's Handbook.



Warning


The seat strap must be removed when installing the tail pack harness. Always refit the original seat strap after removing the tail pack harness kit. The seat strap is required for the safe carriage of a passenger. A passenger who is not able to hold on to a seat strap will be unable to sit securely on the motorcycle and may cause instability which may result in loss of motorcycle control and an accident.

2. Remove the two screws, washers and brackets securing the seat strap to the passenger seat. Retain the screws, washers and brackets for reuse. Retain the seat strap for reuse if the motorcycle is to be returned to its original condition.

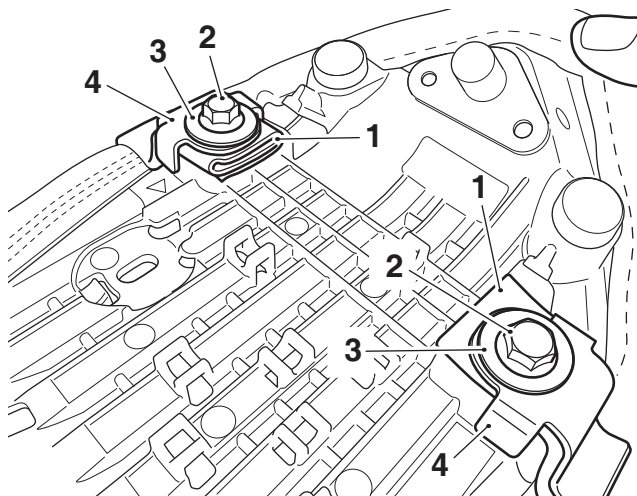


1. Seat strap
2. Screw
3. Washer
4. Bracket

3. Fit the tail pack harness on to the rear of the passenger seat, as shown.

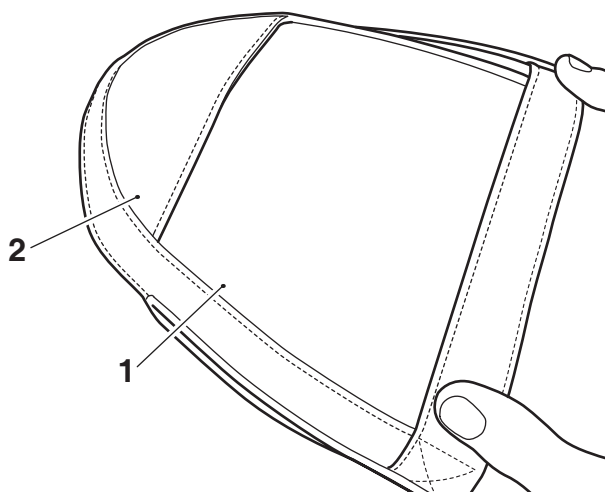


1. Passenger seat
2. Tail pack harness

4. Ensure the harness strap locates correctly on the underside of the seat and the cord is located around the moulding on the seat base as shown.

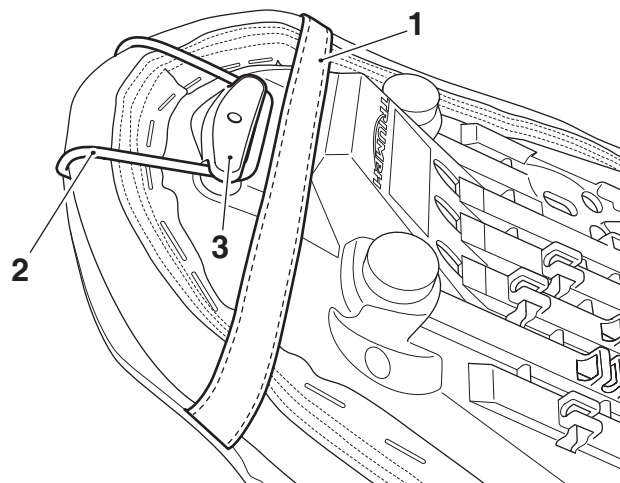

1. Harness strap
2. Cord
3. Moulding, seat base

5. Align the front of the tail pack harness with the seat strap fixing positions in the seat base, fit the original screws, washers and brackets, as shown. Tighten the screws to **10 Nm**.

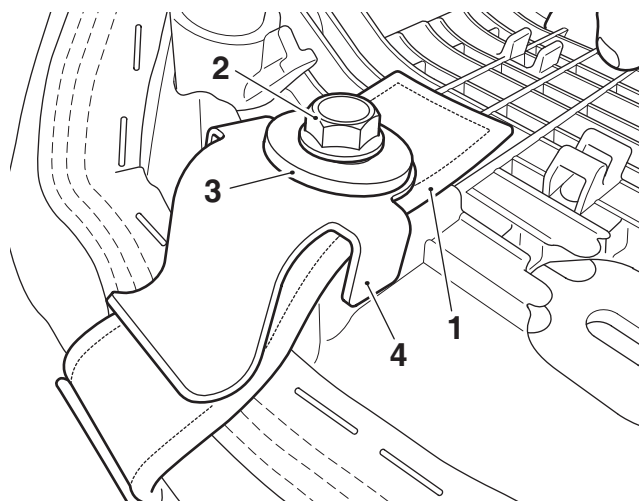


1. Tail pack harness (left hand side shown)
2. Screw
3. Washer
4. Bracket

6. Refit the passenger seat, as described in the Owner's Handbook.

Installing the Tail Pack


1. Position the tail pack on the passenger seat and attach to the tail pack harness with the two zips.

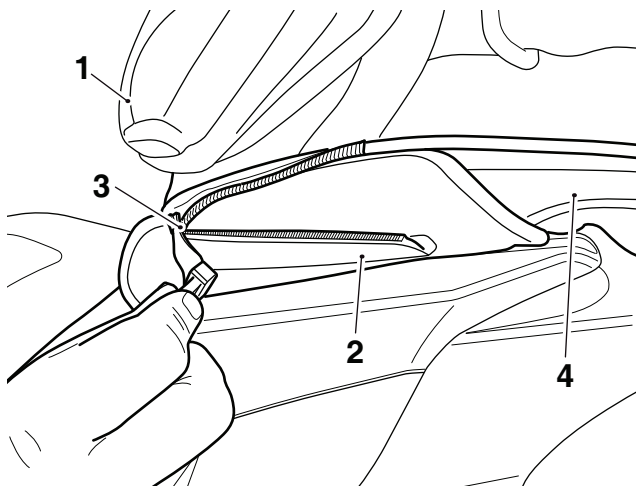

1. Tail pack
2. Tail pack harness (right hand shown)
3. Zip
4. Passenger seat

Note:


- The rear retaining straps are not fitted to all accessory tail pack harnesses.
2. Always ensure the tail pack quick release fasteners, and where applicable the tail pack harness rear retaining straps quick release fasteners, are fastened on to the D-loops, as shown below.

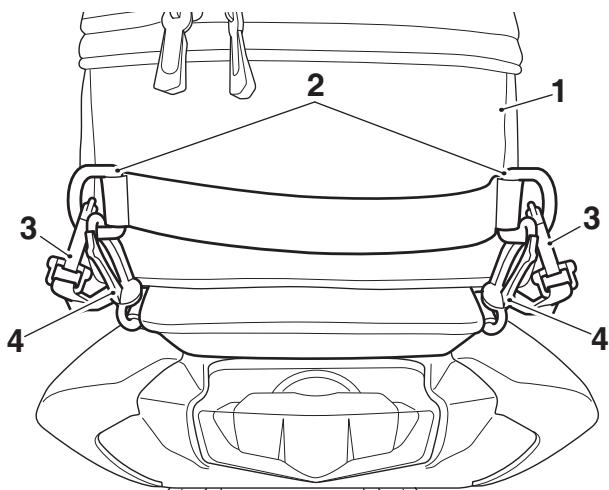

1. Tail pack
2. D-loops
3. Quick release fasteners, tail pack
4. Quick release fasteners, tail pack harness straps

Installing the Rain Cover

3. Position the rain cover over the tail pack, as shown below.

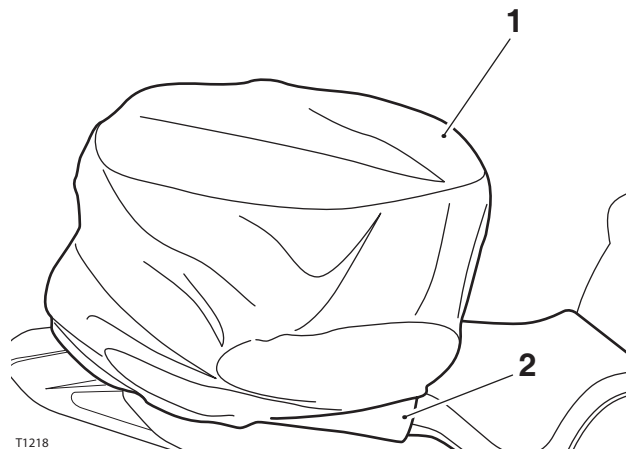

1. Rain cover
2. Tail pack

Cleaning



Caution

Use of chemicals or high-pressure spray washers is not recommended for cleaning the tail pack. Using chemicals or pressure washers may damage the tail pack.

To help maintain its appearance, clean the tail pack using a sponge or cleaning cloth with low alkaline soap and water.

Refitting the Passenger Seat Strap


Note:

- If the tail pack harness is removed from the passenger seat the original seat strap must be refitted.

1. Remove the passenger seat, as described in the Owner's Handbook.
2. Remove the tail pack harness. Retain the tail pack harness, brackets, washers and screws for future use.


Note:

- Identify the type of seat strap. Some incorporate metal grommets at the fixing points, other have plain holes as shown below.

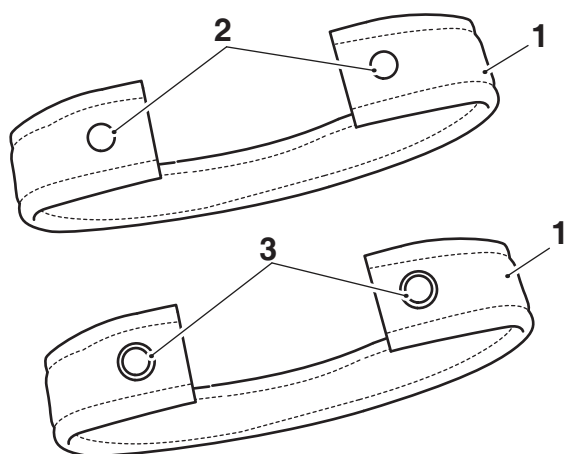

1. Seat strap
2. Plain holes
3. Metal grommets

3. Position the seat strap on to the passenger seat and secure with the original brackets, washers and screws, as shown below.

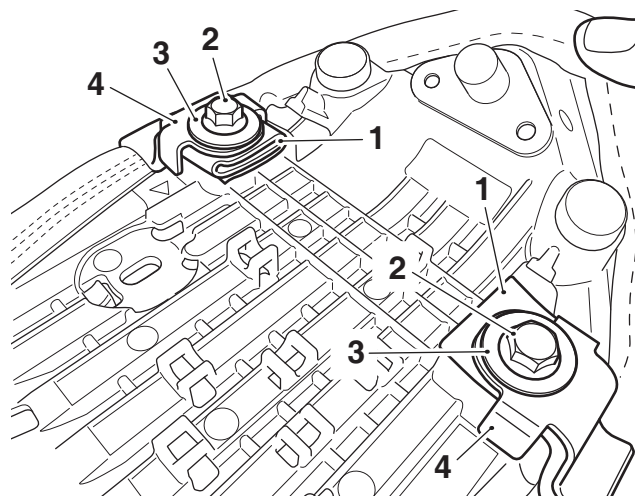

1. Seat strap
2. Screw
3. Washer
4. Bracket

4. If the seat strap has metal grommets tighten the screws to **5 Nm**. If the seat strap has plain holes tighten the screws to **10 Nm**.
5. Refit the passenger seat, as described in the Owner's Handbook.



Warning

The maximum safe load for the tail pack is 3 kg (6.6 lbs). Never exceed this loading limit as this may cause the motorcycle to become unstable and may result in loss of motorcycle control and an accident.



Warning

After fitting the accessory kit the motorcycle will exhibit new handling characteristics. Operate the motorcycle in a safe area free from traffic to gain familiarity with any new characteristics. Operation of the motorcycle when not familiar with any new handling characteristics may result in loss of motorcycle control and an accident.



Warning

Never ride an accessory equipped motorcycle (including those fitted with Triumph approved windscreens and luggage systems) at speeds above 80 mph (130 km/h).

The presence of accessories such as windscreens and luggage systems will cause changes in the stability and handling of the motorcycle. Failure to allow for changes in motorcycle stability may result in loss of motorcycle control and an accident.

Remember that the 80 mph (130 km/h) limit will be reduced by the fitting of non-approved accessories, incorrect loading, worn tyres, overall motorcycle condition and poor road or weather conditions.



Warning

This motorcycle must not be operated above the legal road speed limit except in authorised closed-course conditions.



Warning

Only operate this Triumph motorcycle at high speed in closed-course on road competition or on closed course racetracks. High speed operation should only be attempted by riders who have been instructed in the techniques necessary for high speed riding and are familiar with the motorcycle's characteristics in all conditions.

High speed operation in any other circumstances is dangerous and may result in loss of motorcycle control and an accident.