

Fitting Instructions:
Rocket III Touring
Leather Tank Panel - 9520017, A9520018



Thank you for choosing this Triumph genuine accessory kit. This accessory kit is the product of Triumph's use of proven engineering, exhaustive testing, and continuous striving for superior reliability, safety and performance.

Completely read all of these instructions before commencing the installation of the accessory kit in order to become thoroughly familiar with the kit's features and the installation process.

These instructions should be considered a permanent part of your accessory kit, and should remain with it even if your accessory equipped motorcycle is subsequently sold.




Warning

This accessory kit is designed for use on Triumph Rocket III Touring motorcycles only and should not be fitted to any other Triumph model or to any other manufacturers motorcycle. Fitting this accessory kit to any other Triumph model, or to any other manufacturers motorcycle, may interfere with the rider and could affect the handling, stability or other aspects of the motorcycles operation which may result in loss of motorcycle control and an accident.



Warning

Always have Triumph approved parts, accessories and conversions fitted by a trained technician of an authorised Triumph dealer. The fitment of parts, accessories and conversions by a technician who is not of an authorised Triumph dealer may affect the handling, stability or other aspects of the motorcycles operation which may result in loss of motorcycle control and an accident.

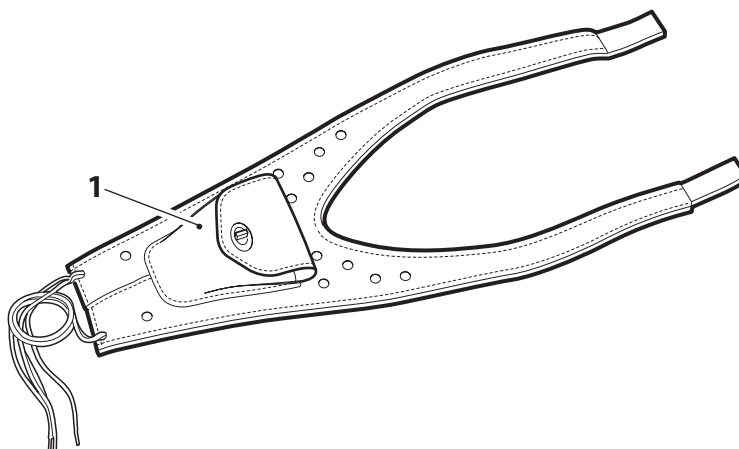

Parts Supplied:

1. Leather tank panel. 1 off



Warning


Throughout this operation, ensure that the motorcycle is stabilised and adequately supported to prevent risk of injury from the motorcycle falling.




Warning

A torque wrench of known accurate calibration must be used when fitting this accessory kit. Failure to tighten any of the fasteners to the correct torque specification may result in loss of motorcycle control and an accident.

1. Remove the seat, airbox cover and instrument nacelle as described in the service manual.
2. Remove the gasket from the instrument nacelle. Retain the gasket if the motorcycle is to be returned to its original condition.
3. Remove the fuel tank front fixings. Raise the front of the fuel tank and support in the raised position with the prop stand as described in the service manual.
4. Clean the underside of the fuel tank and ensure it is thoroughly dry.
5. Locate the tank panel in a central position on the fuel tank. Place the instrument nacelle onto the fuel tank ensuring the tank panel is correctly located underneath the nacelle.
6. Wrap the front straps of the leather tank panel around the front of the fuel tank and mark the positions of the hook and loop pad locations on the underside of the fuel tank.

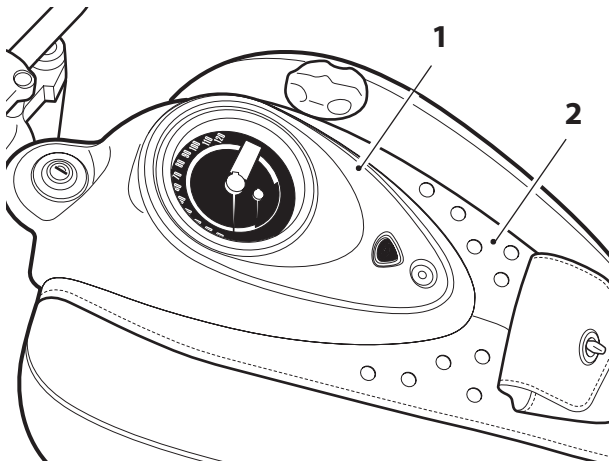


1. Instrument nacelle
2. Leather tank panel

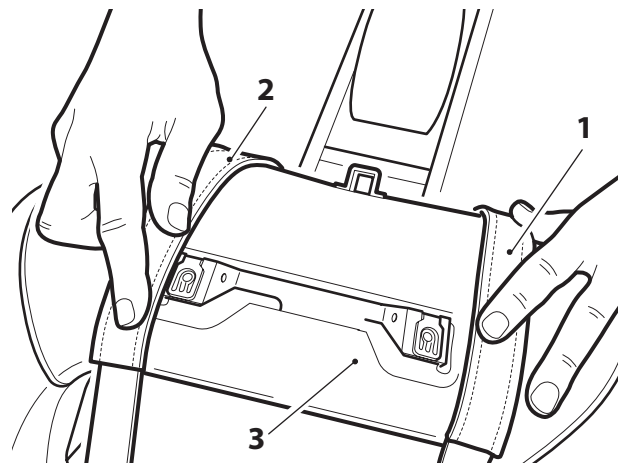

1. Tank panel strap, left hand
2. Tank panel strap, right hand
3. Fuel tank

7. Remove the instrument nacelle and leather tank panel from the fuel tank.
8. Remove the hook & loop pads from the leather tank panel straps.
9. Peel off the protective film from one of the hook & loop pads.


10. Secure the pad to the underside of the fuel tank at the left hand side marked position, shown below. Repeat for the right hand side position.

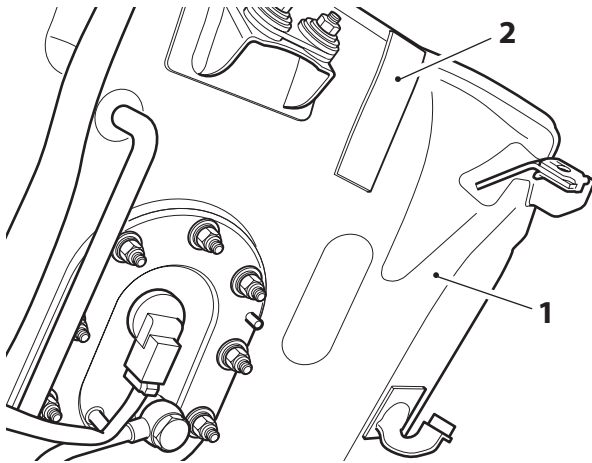

1. Fuel tank, underside

2. Hook and loop pad, left hand side

11. Place the leather tank panel in a central position on the fuel tank.
12. Wrap the front straps of the leather tank panel around the front of the fuel tank. Attach the straps to the hook & loop pads secured to the fuel tank.
13. Secure the opposite end of the leather tank panel to the rear fuel tank mounting point with the tank panel laces.

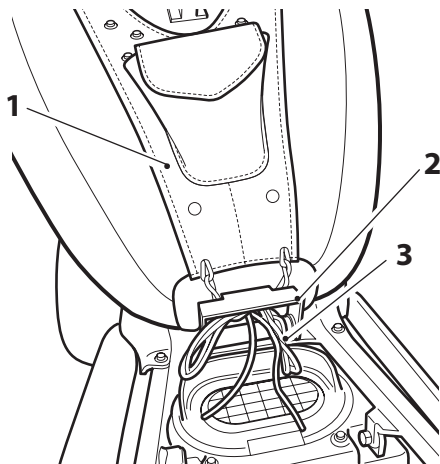

1. Tank panel


2. Fuel tank, rear mounting point

3. Laces

14. Position the instrument nacelle on the fuel tank. Ensure the leather tank panel is trapped between the nacelle and fuel tank. Adjust the hook & loop straps, or laces if required. Ensure the laces are clear of the air intake.

Note:

- Ensure when the tank panel is secured in position, it is clear of the fuel filler cap and is not trapped between the cap and the fuel tank.

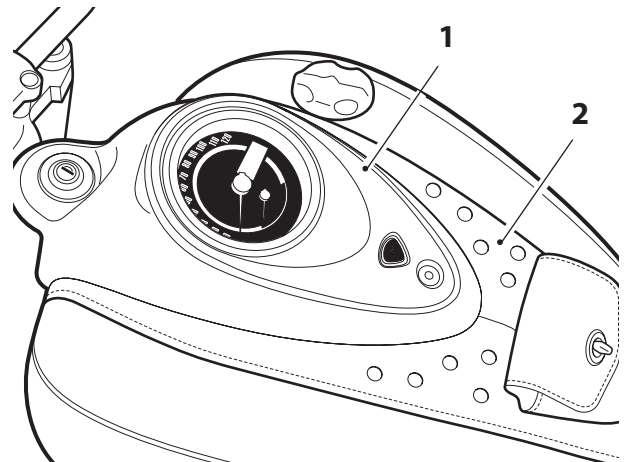

1. Nacelle

2. Leather tank panel

15. Reconnect the instrument nacelle sub-harness and secure the nacelle to the fuel tank as described in the service manual.
16. Refit the fuel tank, airbox cover and seat as described in the service manual.



Warning

After fitting the accessory kit the motorcycle will exhibit new handling characteristics. Operate the motorcycle in a safe area free from traffic to gain familiarity with any new characteristics. Operation of the motorcycle when not familiar with any new handling characteristics may result in loss of motorcycle control and an accident.



Warning

Never ride an accessory equipped motorcycle (including those fitted with Triumph approved windscreens and luggage systems) at speeds above 80 mph (130 km/h).

The presence of accessories such as windscreens and luggage systems will cause changes in the stability and handling of the motorcycle. Failure to allow for changes in motorcycle stability may lead to loss of control or an accident.

Remember that the 80 mph (130 km/h) limit will be reduced by the fitting of non-approved accessories, incorrect loading, worn tyres, overall motorcycle condition and poor road or weather conditions.



Warning

This motorcycle must not be operated above the legal road speed limit except in authorised closed course conditions.



Warning

Only operate this Triumph motorcycle at high speed in closed-course on road competition or on closed course racetracks. High speed operation should only be attempted by riders who have been instructed in the techniques necessary for high speed riding and are familiar with the motorcycle's characteristics in all conditions.

High speed operation in any other circumstances is dangerous and will lead to loss of motorcycle control and an accident.