



Accessory Fitting Instructions

Thank you for choosing this Triumph genuine accessory kit. This accessory kit is the product of Triumph's use of proven engineering, exhaustive testing, and continuous striving for superior reliability, safety and performance.


Completely read all of these instructions before commencing the installation of the accessory kit in order to become thoroughly familiar with the kit's features and the installation process.

These instructions should be considered a permanent part of your accessory kit, and should remain with it even if your accessory equipped motorcycle is subsequently sold.


Rider and Passenger Seat Kits	
Kit Number	Models
Rider Seat - Touring	
A9700876, A2317601	Rocket 3 R, Rocket 3 R Black, Rocket 3 Storm R, Rocket 3 TFC
Rider Seat Infill - Touring	
A9700878	Rocket 3 R, Rocket 3 R Black, Rocket 3 GT, Rocket 3 GT Triple Black, Rocket 3 Storm GT, Rocket 3 Storm R, Rocket 3 TFC
Rider Seat - Sport	
A9700877, A2317602	Rocket 3 GT, Rocket 3 GT Triple Black, Rocket 3 Storm GT, Rocket 3 TFC
Rider Seat Infill - Sport	
A9700879	Rocket 3 R, Rocket 3 R Black, Rocket 3 GT, Rocket 3 GT Triple Black, Rocket 3 Storm GT, Rocket 3 Storm R, Rocket 3 TFC
Passenger Seat - Sport Rider Seat - Touring	
A9700903, A9700950	Rocket 3 GT, Rocket 3 GT Triple Black, Rocket 3 TFC
Passenger Seat - Sport Comfort	
A2307859	Rocket 3 R, Rocket 3 R Black, Rocket 3 Storm GT, Rocket 3 Storm R, Rocket 3 TFC
A2317704	Rocket 3 R, Rocket 3 R Black, Rocket 3 TFC
Passenger Seat - Touring	
A9700904	Rocket 3 R, Rocket 3 R Black, Rocket 3 Storm R, Rocket 3 TFC
A9700951	Rocket 3 R, Rocket 3 R Black, Rocket 3 TFC

Parts supplied

A9700876, A2317601

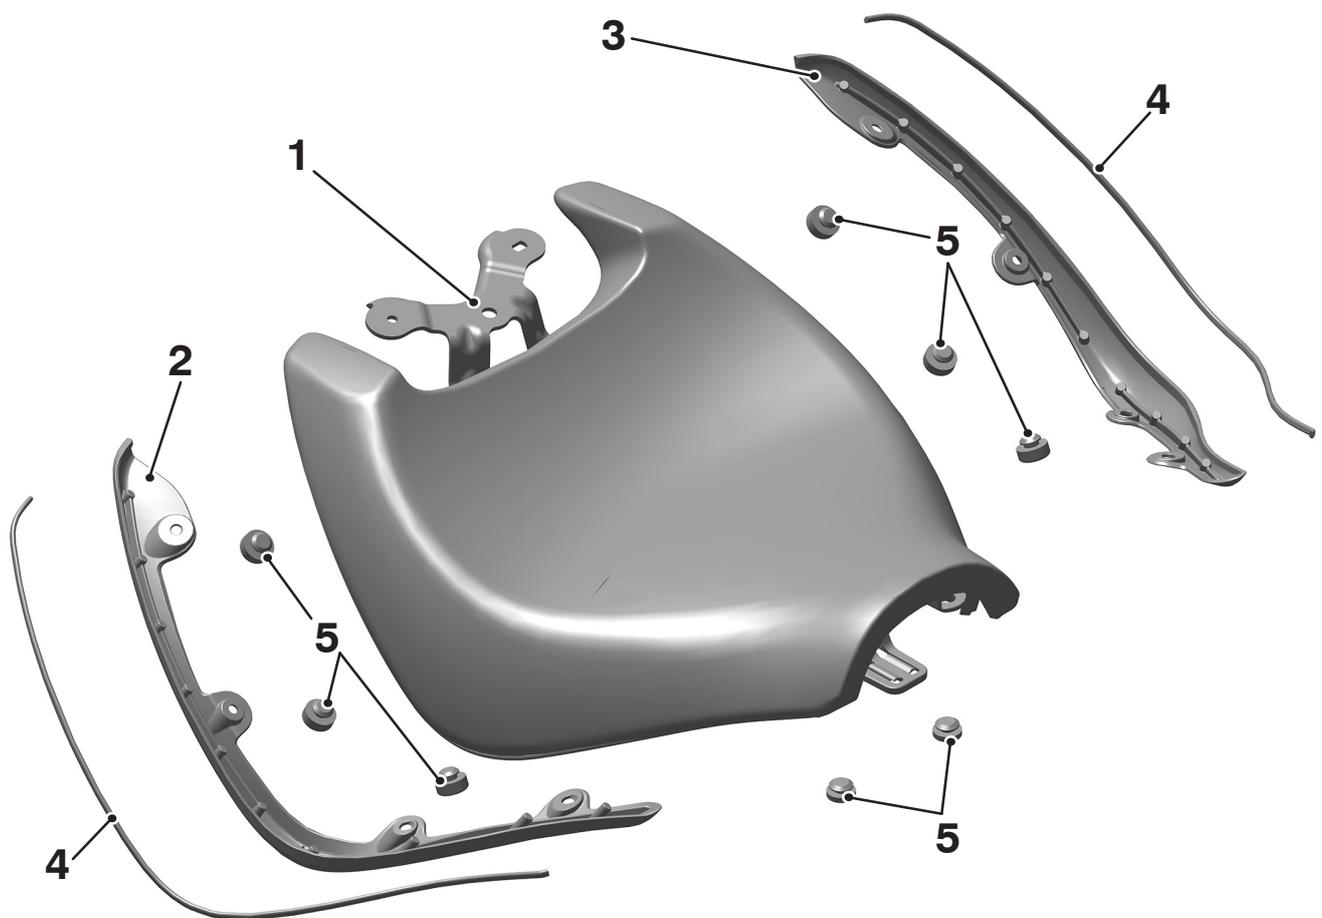


1. Rider seat	1 off	4. Trim, finisher	2 off
2. Finisher, left hand	1 off	5. Fixing	8 off
3. Finisher, right hand	1 off		

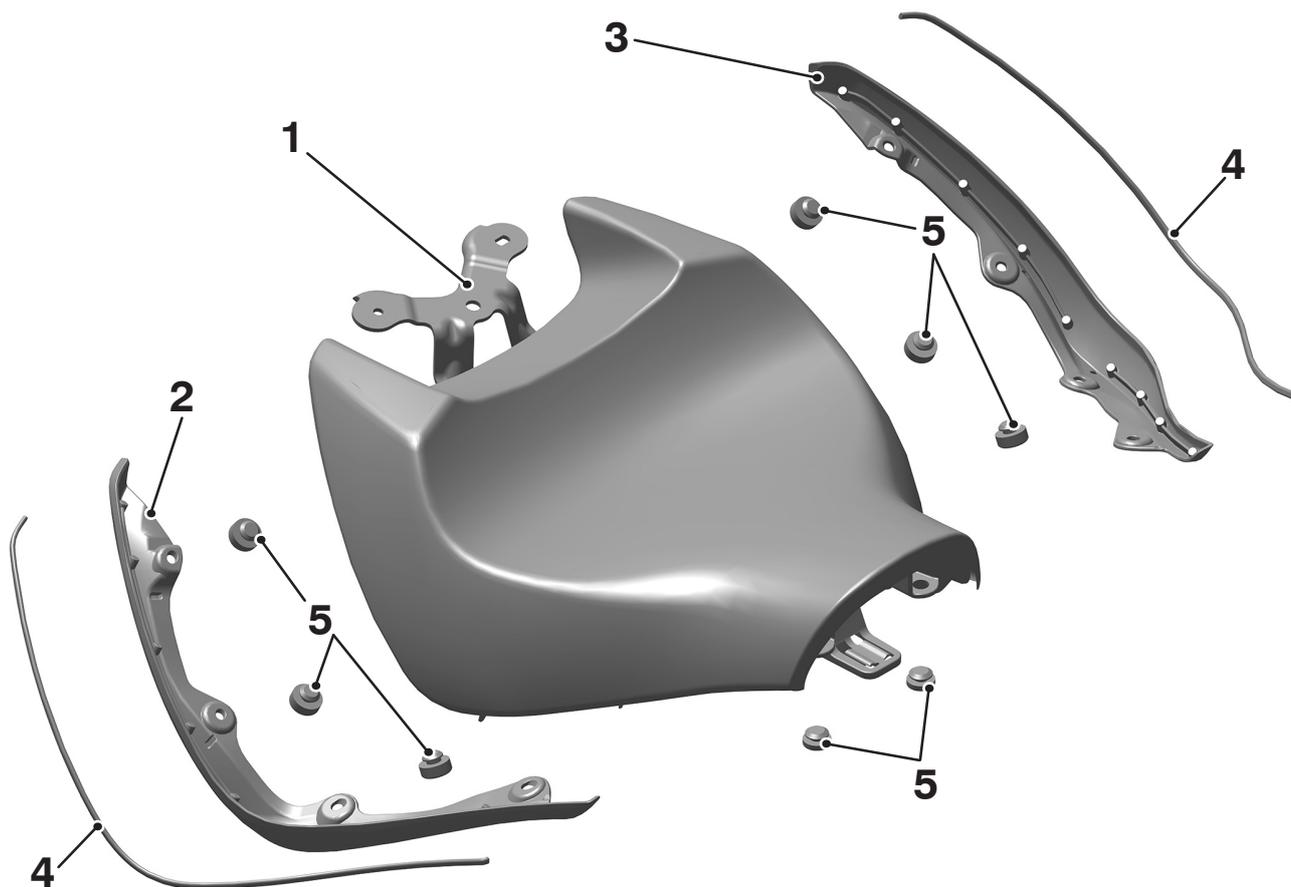


1. Rider seat	1 off	4. Trim, finisher	2 off
2. Finisher, left hand	1 off	5. Fixing	8 off
3. Finisher, right hand	1 off		

A2307859, A2317704, A9700903, A9700904, A9700950, A9700951

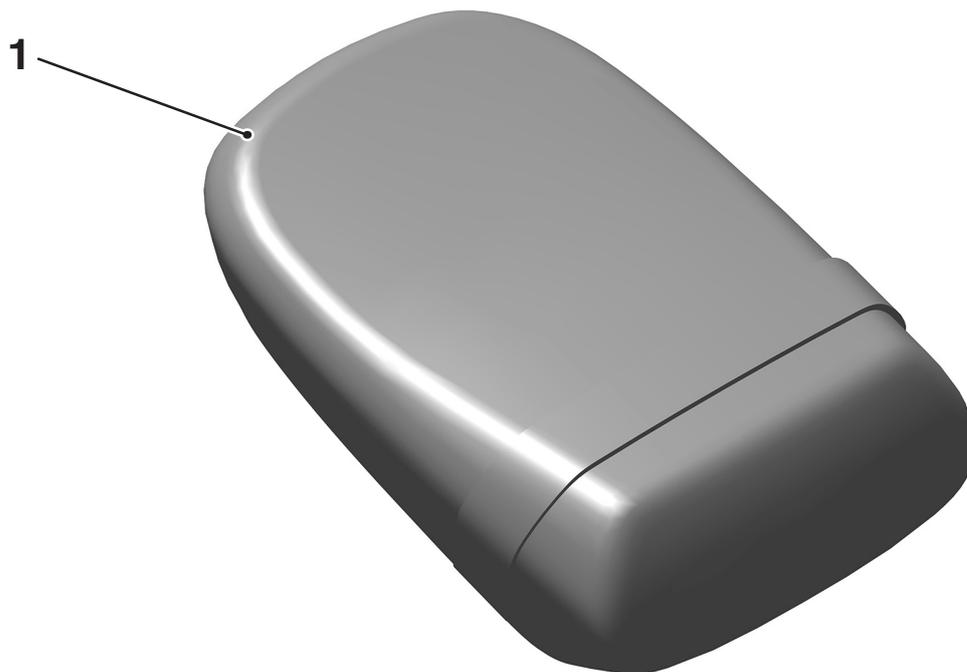


1. Passenger seat - sport	1 off
---------------------------	-------

A9700878

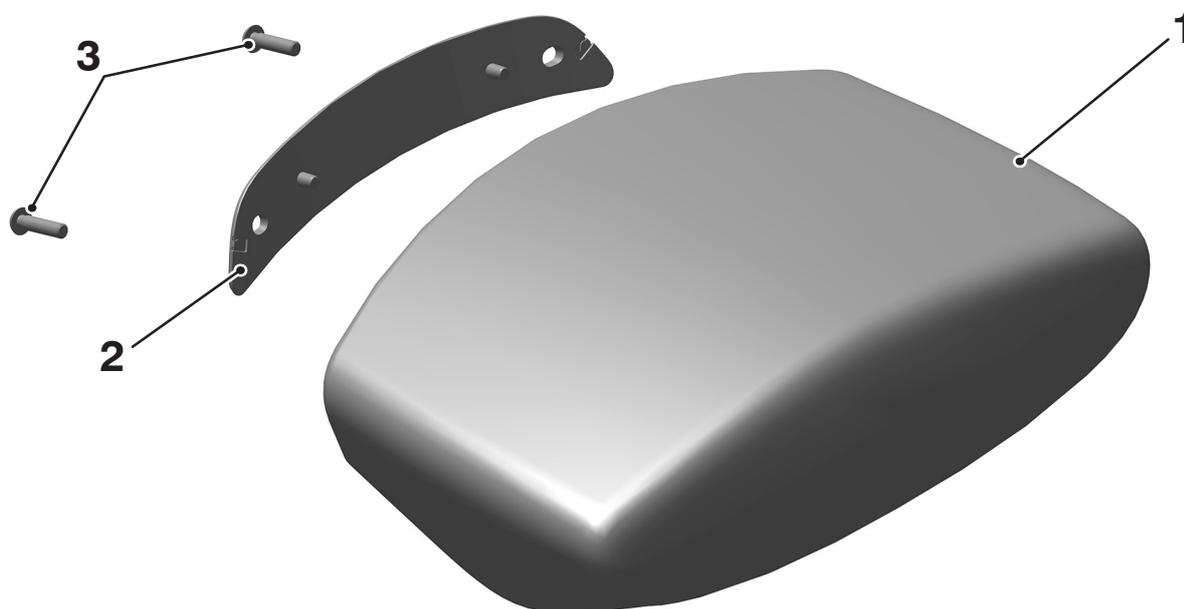

1. Infill, rider seat - touring	1 off	3. Fixing	2 off
2. Badge	1 off	4. Washer (not shown)	2 off

A9700879

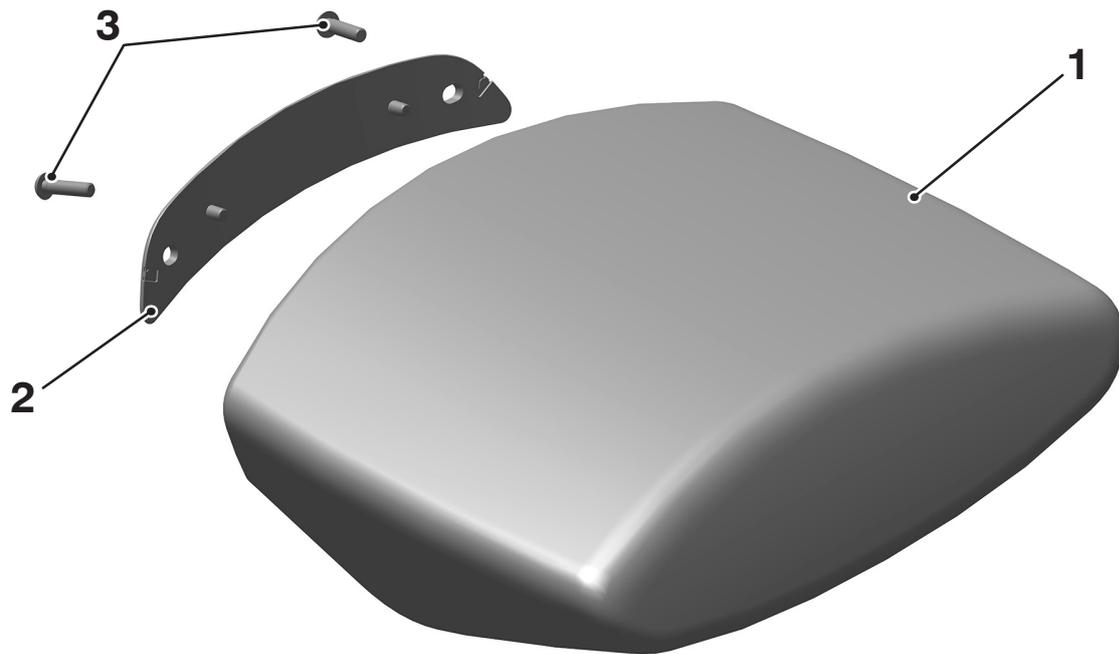

1. Infill, rider seat - sport	1 off	3. Fixing	2 off
2. Badge	1 off	4. Washer (not shown)	2 off

⚠ WARNING

Fit only genuine Triumph accessories to those models approved by Triumph as listed in the associated Triumph fitting instructions.

The accessory kits covered in this instruction are designed for use on specific models of Triumph motorcycle. The accessory kits and the models applicable are listed at the start of the instruction. They should never be fitted to any other Triumph model or to any other manufacturer's motorcycle.

Fitting an accessory kit to a Triumph model not listed, or to any other manufacturer's motorcycle, will affect the performance, stability and handling of the motorcycle.

Failure to follow the advice above may lead to loss of motorcycle control which could result in serious injury or death.

⚠ WARNING

Always have Triumph approved parts, accessories and conversions fitted by a competent person with the specialist knowledge and technical understanding of motorcycles, such as an authorised Triumph dealer.

The fitment of parts, accessories and conversions by a person without the specialist knowledge and technical understanding of motorcycles may affect the handling, stability or other aspects of the motorcycle's operation.

Failure to follow the advice above may lead to loss of motorcycle control which could result in serious injury or death.

⚠ WARNING

A torque wrench of known accurate calibration must be used when fitting this accessory kit.

Failure to tighten any of the fasteners to the correct torque specification may affect motorcycle performance, handling and stability.

Failure to follow the advice above may lead to loss of motorcycle control which could result in serious injury or death.

⚠ WARNING

Make sure the motorcycle is stabilised and adequately supported.

Do not support the motorcycle on any ancillary component, the exhaust system or any other non structural parts of the motorcycle frame.

A correctly supported motorcycle will help prevent it from falling.

An unstable motorcycle may fall resulting in motorcycle damage, serious injury or death.

NOTICE

Triumph offers a broad range of approved genuine accessories for your motorcycle.


We cannot therefore cover all possible equipment variations in these instructions. For removal and installation of Triumph Genuine Accessories, always refer to the instructions supplied with the respective accessory kit.

To obtain additional copies of any Triumph accessory instructions, visit www.triumphinstructions.com or contact your authorised Triumph dealer.

1. Remove the seats as described in the Service Manual.

Rider Seat

2. Remove the three lock nuts and washers securing the passenger seat to the rider seat. Remove the passenger seat and seat strap. Retain the passenger seat, seat strap, lock nuts and washers for reuse. Retain the rider seat for reuse if the motorcycle is to be returned to its original condition.

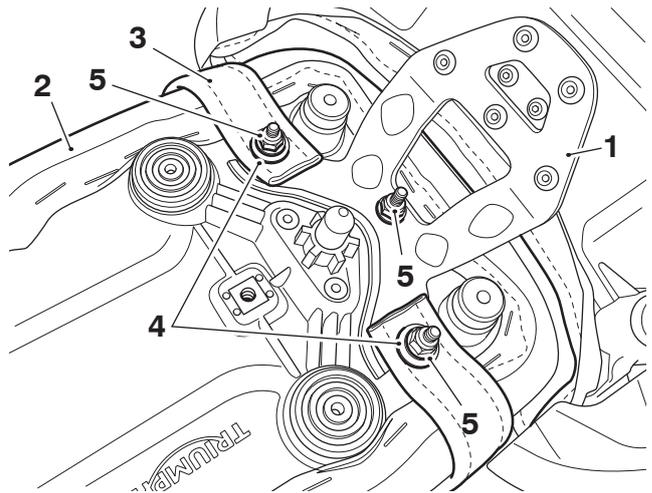


1. Rider seat
2. Passenger seat
3. Seat strap
4. Washers
5. Lock nuts

3. Collect the rider seat, left hand and right hand finishers, finisher trims and fixings from the kit.

NOTICE


The finisher trims have a larger profile on one side. The larger profile of the trim should be positioned on the inside of the finisher.

- Starting at the rear end of the finisher, fit a finisher trim to the top edge of the right hand finisher, as shown below.

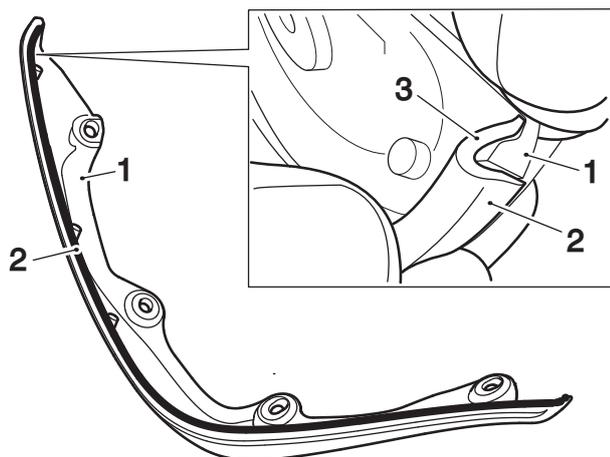


- Finisher, right hand
- Trim
- Larger profile

- Fit the right hand finisher on to the right hand side of the rider seat in the orientation shown and align the fixing positions with the captive nuts fitted to the seat.

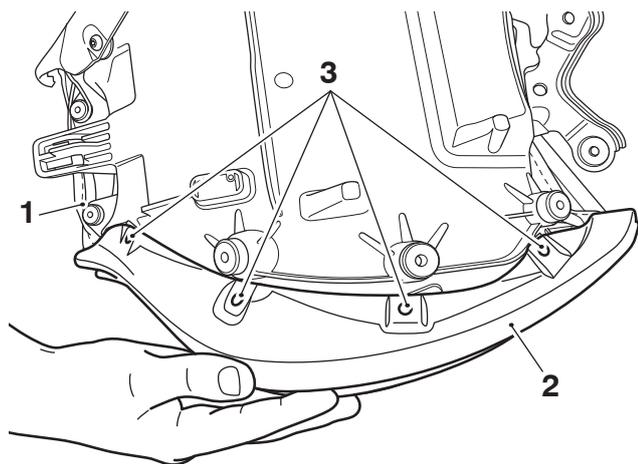


- Rider seat
- Finisher, right hand
- Fixing positions

- Loosely fit the four finisher fixings. Pinch together the finisher, trim and seat at the rear and tighten the rear fixing to 3 Nm. Pinch together the finisher, trim and seat at the front and tighten the front fixing to 3 Nm. Next, tighten the front middle fixing to 3 Nm. Finally, tighten the rear middle fixing to 3 Nm.

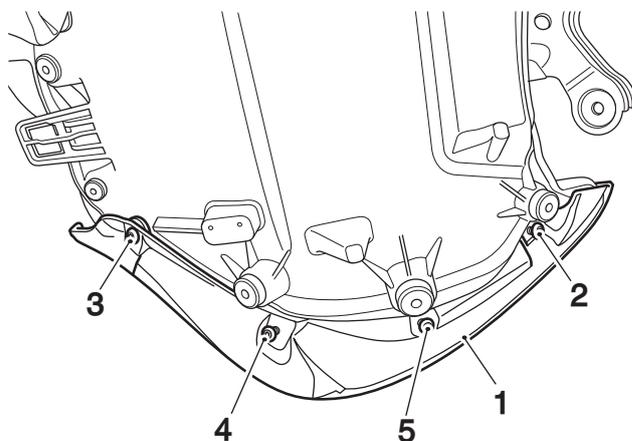

- Finisher, right hand
- Fixing, rear
- Fixing, front
- Fixing, front middle
- Fixing, rear middle

- Repeat steps 4 to 6 for the left hand finisher.
- Fit the passenger seat with seat strap to the rider seat and secure with the original washers and lock nuts. Tighten the lock nuts to 8 Nm.

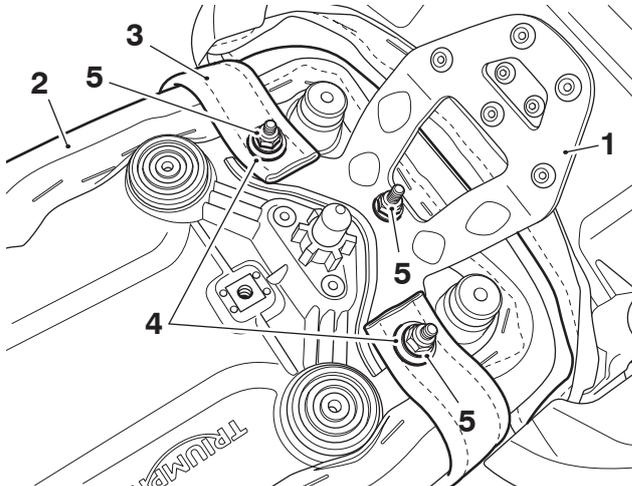

- Rider seat
- Passenger seat
- Seat strap
- Washers
- Lock nuts


- Refit the seats as described in the Service Manual.

Rider Seat Infill Badge Fitment

NOTICE

The badge should be fitted to the rider seat infill before the infill is fitted to the motorcycle.

10. Collect the rider seat infill, badge, fixings and washers from the kit.
11. Fit the fixings through the badge fixing positions and fit the washers on to the fixings at the rear of the badge.
12. Fit the badge on the rear of the seat infill ensuring the washers remain on the fixings positioned between the badge and seat infill. Tighten the fixings to 2 Nm.

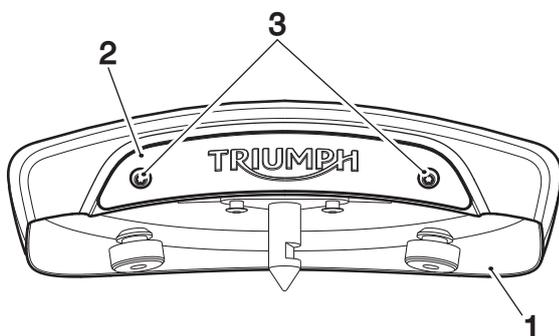

1. Rider seat infill
2. Badge
3. Fixings


Passenger Seat and Rider Seat Infill

NOTICE

The procedure to fit an accessory passenger seat or rider seat infill is the same, however the seat strap is not reused when fitting an accessory rider seat infill.

13. Remove the three lock nuts and washers securing the passenger seat to the rider seat, as shown below. Remove the passenger seat and seat strap. Retain the rider seat, seat strap, lock nuts and washers for reuse. Retain the passenger seat for reuse if the motorcycle is to be returned to its original condition.

14. Fit the passenger seat from the kit with the original seat strap, or the rider seat infill from the kit to the rider seat and secure with the original washers and lock nuts. Tighten the lock nuts to 8 Nm.

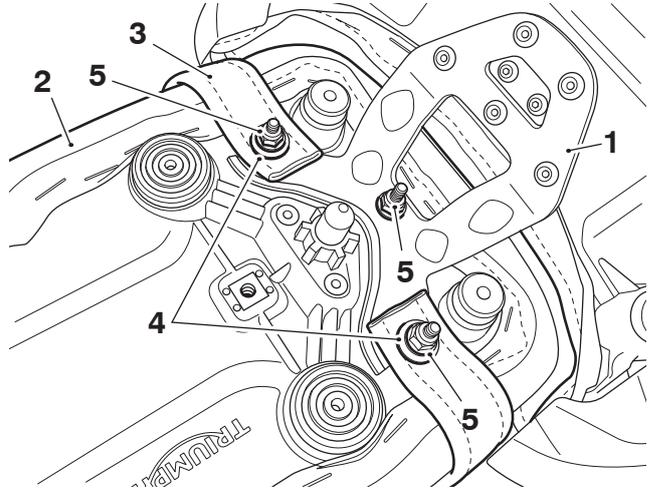

1. Rider seat
2. Passenger seat
3. Seat strap
4. Washers
5. Lock nuts

15. Refit the seats as described in the Service Manual.

⚠ WARNING

After fitting the accessory kit the motorcycle will exhibit new handling characteristics.

Operate the motorcycle in a safe area free from traffic to gain familiarity with any new characteristics.

Operation of the motorcycle when not familiar with any new handling characteristics may lead to loss of motorcycle control which could result in serious injury or death.

⚠ WARNING

If, after fitting this accessory kit, you have any doubt about the performance of any aspect of the motorcycle, contact a competent person with the specialist knowledge and technical understanding of motorcycles, such as an authorised Triumph dealer.

Riding a motorcycle when there is any doubt as to any aspect of the performance of the motorcycle may lead to loss of motorcycle control which could result in serious injury or death.

⚠ WARNING

Never ride an accessory-equipped motorcycle at speeds above 80 mph (130 km/h).

Remember that the 80 mph (130 km/h) limit will be reduced by the fitting of non-approved accessories, incorrect loading, worn tyres, overall motorcycle condition and poor road or weather conditions.

The presence of accessories will cause changes in the stability and handling of the motorcycle. Failure to allow for changes in motorcycle stability may lead to loss of motorcycle control which could result in serious injury or death.

⚠ WARNING

High-speed operation should only be attempted by riders who have been instructed in the techniques necessary for high-speed riding and are familiar with the motorcycle's characteristics in all conditions.

Only operate this Triumph motorcycle at high speed in closed-course, on-road competition or on closed-course racetracks.

High-speed operation in any other circumstances is dangerous and may lead to loss of motorcycle control which could result in serious injury or death.

NOTICE

The motorcycle must not be operated above the legal road speed limit except in closed-course conditions.