

Fitting Instructions:
Tiger (1050cc)
Tank pad - A9720023



Warning


Throughout this operation, ensure that the motorcycle is stabilised and adequately supported on a paddock stand to prevent risk of injury from the motorcycle falling.

Warning

Always have Triumph approved parts, accessories and conversions fitted by a trained technician of an authorised Triumph dealer. The fitment of parts, accessories and conversions by a technician who is not of an authorised Triumph dealer may affect the handling, stability or other aspects of the motorcycles operation which may result in loss of motorcycle control and an accident.

Warning

This accessory kit is designed for use on Triumph Tiger (1050cc) motorcycles only and should not be fitted to any other Triumph model or to any other manufacturers motorcycle. Fitting this accessory kit to any other Triumph model, or to any other manufacturers motorcycle, may interfere with the rider and could affect the handling, stability or other aspects of the motorcycles operation which may result in loss of motorcycle control and an accident.

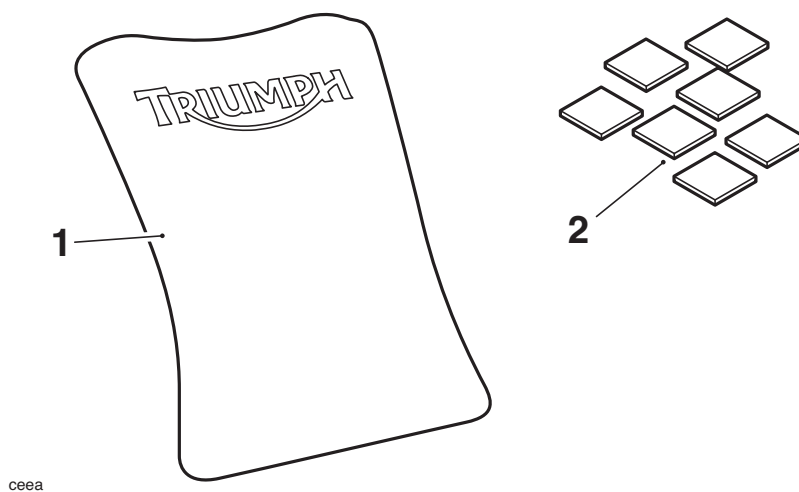

Parts Supplied:


- 1. Tank pad, carbon fibre 1 off
- 2. Adhesive pad 25mm x 25mm 7 off
- 3. Surface cleaner (not shown) 1 off



Warning


Read the warning advice printed on the cleansing swab packaging.

1. Clean the surface of the fuel tank and the rear surface of the tank pad with the surface cleaner supplied in the kit.
2. Remove the backing strip from one side of the six adhesive pads and apply the pads to the underside of the tank pad as shown below. Do not remove the backing from the reverse side of the adhesive pads at this stage.

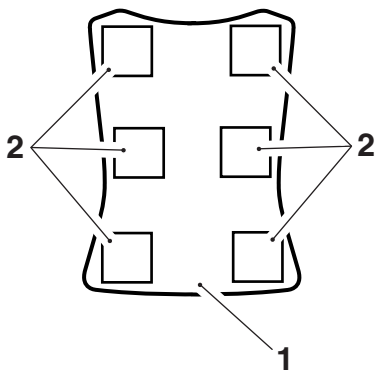

1. Tank pad
2. Adhesive pads

3. Position the tank pad to the fuel tank as shown below, and using suitable adhesive masking tape (not supplied in the kit) carefully mark the fitted position of the tank pad.

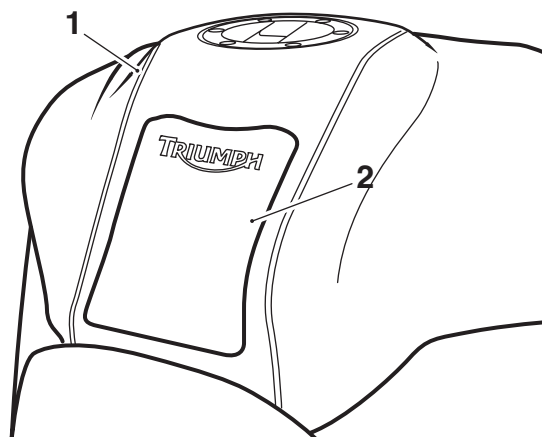

1. Fuel tank
 2. Tank pad
4. Remove the backing strips from the adhesive pads and carefully apply the tank pad to the fuel tank, in the previously marked position, using firm pressure.
 5. Remove the masking tape from the fuel tank.