

English


**Fitting Instructions:**  
**Tiger Explorer and Tiger Explorer XC**  
**T2308141, T2308142 and T2308143**

Thank you for choosing this Triumph genuine accessory kit. This accessory kit is the product of Triumph's use of proven engineering, exhaustive testing, and continuous striving for superior reliability, safety and performance.

Completely read all of these instructions before commencing the installation of the accessory kit in order to become thoroughly familiar with the kit's features and the installation process.

These instructions should be considered a permanent part of your accessory kit, and should remain with it even if your accessory-equipped motorcycle is subsequently sold.

**T2308141, T2308142 or T2308143**

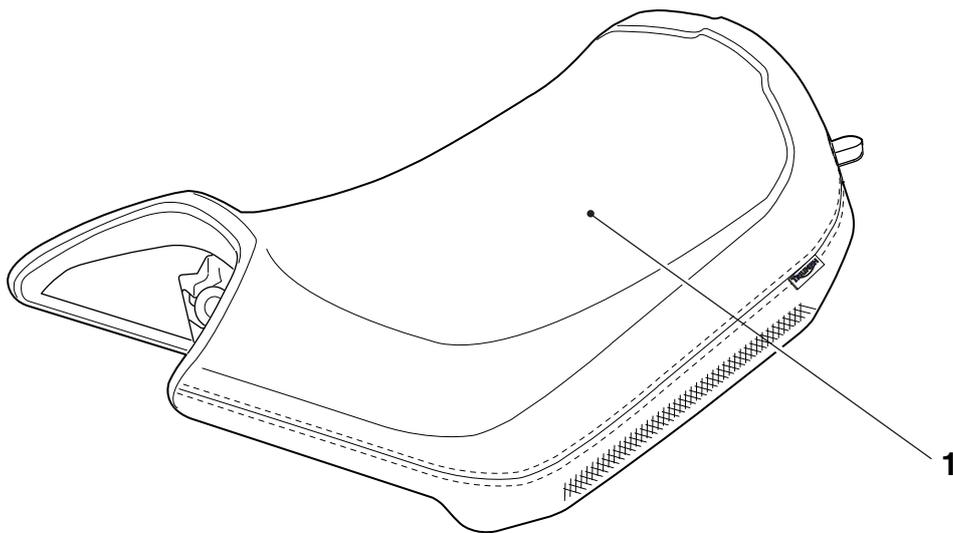

**Parts Supplied:**

1. Rider's seat	1 off	
-----------------	-------	--

**Warning**

This accessory kit is designed for use on Triumph Tiger Explorer and Tiger Explorer XC motorcycles only and should not be fitted to any other Triumph model or to any other manufacturer's motorcycle. Fitting this accessory kit to any other Triumph model, or to any other manufacturer's motorcycle, may interfere with the rider and could affect the handling, stability or other aspects of the motorcycle's operation which may result in loss of motorcycle control and an accident.

**Warning**

Always have Triumph approved parts, accessories and conversions fitted by a trained technician of an authorised Triumph dealer. The fitment of parts, accessories and conversions by a technician who is not of an authorised Triumph dealer may affect the handling, stability or other aspects of the motorcycle's operation, which may result in loss of motorcycle control and an accident.

**Warning**

Throughout this operation, ensure that the motorcycle is stabilised and adequately supported on its centre stand to prevent risk of injury from the motorcycle falling.

**Warning**

A torque wrench of known accurate calibration must be used when fitting this accessory kit. Failure to tighten any of the fasteners to the correct torque may affect motorcycle performance, handling and stability. This may result in loss of motorcycle control and an accident.


1. Place the motorcycle on its centre stand.

**Caution**

If removing heated seats for any reason, always disconnect the heated seat harness. Do not allow the heated seats to hang freely on the sub-harness as this would result in irreparable damage to the heated seat.


2. Remove the seats as described in the Owner's Handbook.

3. Noting the orientation of the rear adjuster bar rubbers, undo the fixings and remove the bar from the rider's seat.

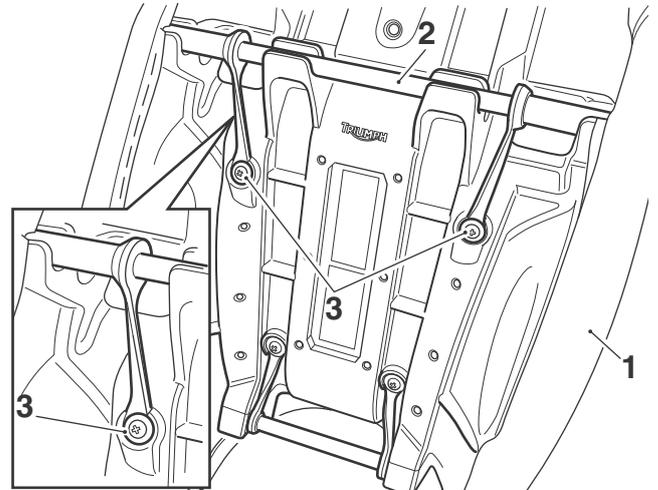

1. Rider's seat
2. Rear adjuster bar
3. Fixings

4. Recover the accessory rider's seat from the kit.
5. If fitted, remove the rear adjuster bar from the accessory rider's seat and discard.
6. Fit the rear adjuster bar to the accessory seat ensuring the adjuster bar rubber is positioned as noted during removal. Tighten the fixings to **0.5 Nm**.

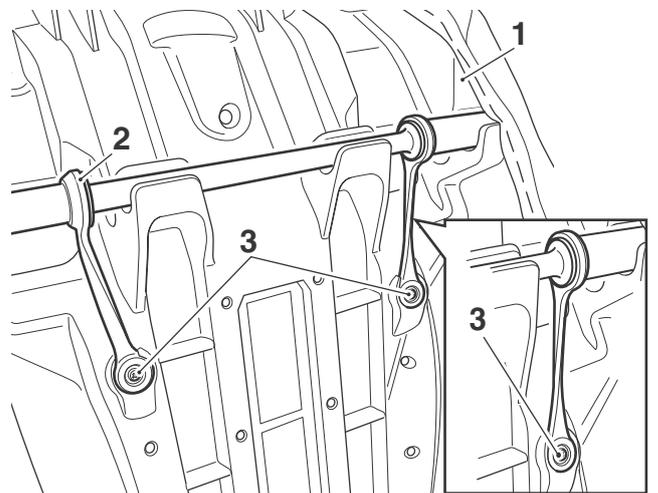

1. Accessory rider's seat
2. Rear adjuster bar
3. Fixings

7. Refit the seats as described in the Owner's Handbook.



### **Warning**

If, after fitment of this accessory kit, you have any doubt about the performance of any aspect of the motorcycle, contact an authorised Triumph dealer and do not ride the motorcycle until the authorised dealer has declared it fit for use. Riding a motorcycle when there is any doubt as to any aspect of the performance of the motorcycle may result in loss of control of the motorcycle leading to an accident.



### **Warning**

The motorcycle must not be operated above the legal road speed limit except in closed-course conditions.



### **Warning**

Only operate this Triumph motorcycle at high speed in closed-course on road competition or on closed-course racetracks. High speed operation should only be attempted by riders who have been instructed in the techniques necessary for high speed riding and are familiar with the motorcycle's characteristics in all conditions.

High speed operation in any other circumstances is dangerous and will lead to loss of motorcycle control and an accident.